

LIGHTLIGHT® MONO-SHOP MONO|HALB SURFACE

Number of heads	1
Mounting	LightLight® Mono
Lamps description	QR-C 38 clear/frosted B15d 20/35W or LED QR-C 38 B15d 6W 370 lm 2700K CRI 90
Voltage (V)	12
Environment	Indoor

OPTICAL


Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	38°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Insulation class	Class II

PHYSICAL

Length of rod (mm)	700
Height (mm)	82
Spot diameter (mm)	25
Construction material	Aluminium
Weight (kg)	0,36




LightLight® Mono-Shop Mono|Halb Surface


designed by Hans Buschfeld

Luminaire to be installed on wall or ceiling. Transformer included.

● BU26201A	Anodised aluminium
● BU26201B	Black
● BU26201P	Polished aluminium
● BU26201W	White

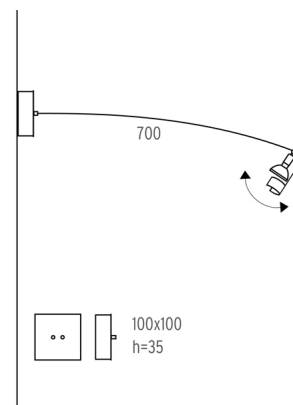

CERTIFICATIONS

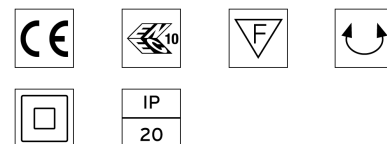

LightLight® Mono-Shop Mono|Halb Surface . Lamps



BU30 Frosted

QR-C 38

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
B15d

Lamp angle:
32 °

Color temperature (K):
3000 °K

Catalog reference:
BU30 Frosted

Lamp type:
QR-C 38



BU10 Frosted

QR-C 38

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
B15d

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
BU10 Frosted

Lamp type:
QR-C 38



BU95

LED QR-C 38

Lamp Watt:
6 W

Lamp category:
Halogen low voltage


Socket:
B15d

Lamp angle:
42 °

Color temperature (K):
2700 °K

Catalog reference:
BU95

Lamp type:
LED QR-C 38




LightLight® Mono-Shop Mono|Halb Surface

designed by Hans Buschfeld

Luminaire to be installed on wall or ceiling. Transformer included.

	BU26201A	Anodised aluminium
	BU26201B	Black
	BU26201P	Polished aluminium
	BU26201W	White

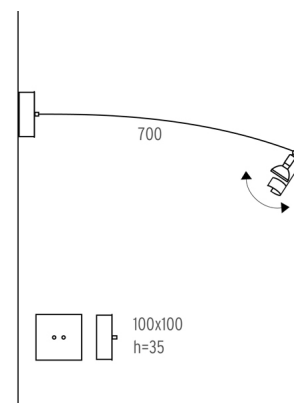

CERTIFICATIONS

