

# FLOS

## LIGHTLIGHT® PEND/CEILING-FLEX|B15

<b>Number of heads</b>	1
<b>Mounting</b>	LightLight® Pend/Ceiling
<b>Lamps description</b>	QR-C 38 clear/frosted B15d 20/35W or LED QR-C 38 B15d 6W 370 lm 2700K CRI 90
<b>Voltage (V)</b>	12
<b>Environment</b>	Indoor

### OPTICAL

<b>Light controller description</b>	Bare lamps
<b>Aiming</b>	Directional
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	38°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Height (mm)</b>	82
<b>Spot diameter (mm)</b>	25
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,03




### LightLight® Pend/Ceiling-Flex|B15 designed by Hans Buschfeld

Spotlight to be installed on 12V pending or ceiling track system. Track adapter integrated.

 BU32000P Polished aluminium

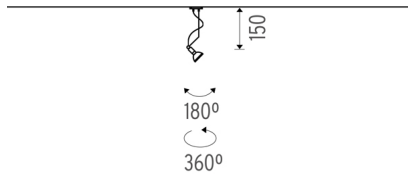

### CERTIFICATIONS

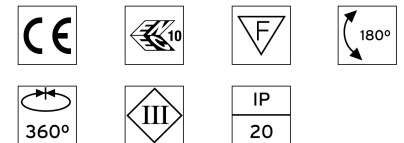

## LightLight® Pend/Ceiling-Flex|B15 . Lamps



BU30 Frosted

**QR-C 38**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
B15d

**Lamp angle:**  
32 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU30 Frosted

**Lamp type:**  
QR-C 38



BU10 Frosted

**QR-C 38**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
B15d

**Lamp angle:**  
40 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU10 Frosted

**Lamp type:**  
QR-C 38



BU95

**LED QR-C 38**

**Lamp Watt:**  
6 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
B15d

**Lamp angle:**  
42 °

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
BU95

**Lamp type:**  
LED QR-C 38




**LightLight® Pend/Ceiling-Flex|B15**  
designed by Hans Buschfeld

Spotlight to be installed on 12V  
pending or ceiling track system. Track  
adapter integrated.

BU32000P

Polished aluminium

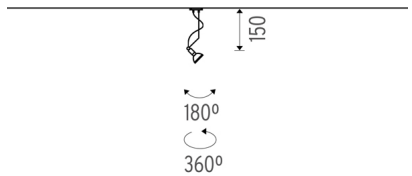

### CERTIFICATIONS

