

LIGHTLIGHT® PEND/CEILING-FLEX|DISC 70

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-70 BA15d 20/50W
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	24°, 8°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III





PHYSICAL


Height (mm)	25
Spot diameter (mm)	74
Construction material	Aluminium
Weight (kg)	0,06




LightLight® Pend/Ceiling-Flex|Disc 70
designed by Hans Buschfeld

Spotlight to be installed on 12V
pending or ceiling track system. Track
adaptor integrated.

	BU32005W	White
	BU32005A	Anodised aluminium
	BU32005B	Black
	BU32005P	Polished aluminium

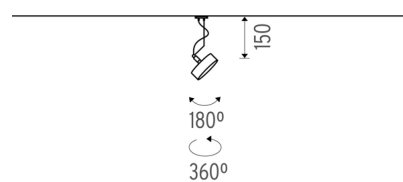

CERTIFICATIONS

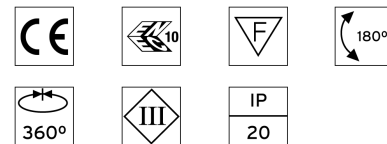

FLOS

LightLight® Pend/Ceiling-Flex|Disc 70 . Lamps



60.6369

QR-70

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6369

Lamp type:
QR-70

60.6370

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6370

Lamp type:
QR-70

60.6371

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
24 °





Color temperature (K):
3000 °K


Catalog reference:
60.6371

Lamp type:
QR-70

LightLight® Pend/Ceiling-Flex|Disc 70
designed by Hans Buschfeld

Spotlight to be installed on 12V
pending or ceiling track system. Track
adapter integrated.

	BU32005W	White
	BU32005A	Anodised aluminium
	BU32005B	Black
	BU32005P	Polished aluminium

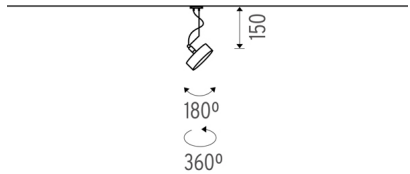

CERTIFICATIONS

