

LIGHTLIGHT® PEND/CEILING-FLEX|MINITUBE

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-CBC 25 clear/frosted GZ4 20/35W
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	34°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL

Height (mm)	49
Spot diameter (mm)	30
Construction material	Aluminium
Weight (kg)	0,03




LightLight® Pend/Ceiling-Flex|Minitube


designed by Hans Buschfeld

Spotlight to be installed on 12V pending or ceiling track system. Track adapter integrated.

	BU32105A	Anodised aluminium
	BU32105B	Black
	BU32105P	Polished aluminium

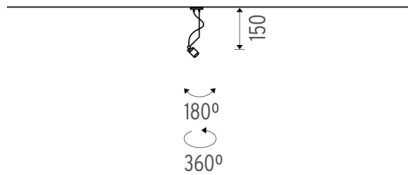

CERTIFICATIONS

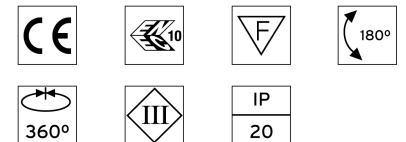

FLOS

LightLight® Pend/Ceiling-Flex|Minitube . Lamps



BU62
QR-CBC 25
Lamp Watt:
 20 W
Lamp category:
 Halogen low voltage
Socket:
 GZ4
Lamp angle:
 40 °
Color temperature (K):
 3000 °K
Catalog reference:
 BU62
Lamp type:
 QR-CBC 25



BU68
QR-CBC 25
Lamp Watt:
 35 W
Lamp category:
 Halogen low voltage
Socket:
 GZ4
Lamp angle:
 44 °
Color temperature (K):
 3000 °K
Catalog reference:
 BU68
Lamp type:
 QR-CBC 25



BU61
QR-CBC 25
Lamp Watt:
 20 W
Lamp category:
 Halogen low voltage
Socket:
 GZ4
Lamp angle:
 21 °
Color temperature (K):
 3000 °K
Catalog reference:
 BU61
Lamp type:
 QR-CBC 25



BU64
QR-CBC 25
Lamp Watt:
 35 W
Lamp category:
 Halogen low voltage
Socket:
 GZ4
Lamp angle:
 24 °
Color temperature (K):
 3000 °K
Catalog reference:
 BU64
Lamp type:
 QR-CBC 25




LightLight® Pend/Ceiling-Flex| Minitube

designed by Hans Buschfeld

Spotlight to be installed on 12V pending or ceiling track system. Track adapter integrated.

-  BU32105A Anodised aluminium
-  BU32105B Black
-  BU32105P Polished aluminium

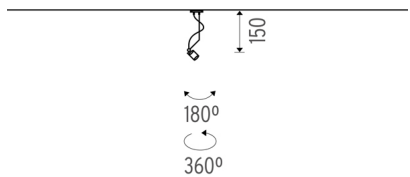

CERTIFICATIONS

