

## LIGHTLIGHT® PEND/CEILING-SPOT 5|SHORT

|                          |                          |
|--------------------------|--------------------------|
| <b>Number of heads</b>   | 1                        |
| <b>Mounting</b>          | LightLight® Pend/Ceiling |
| <b>Lamps description</b> | QR-48 GY4 20W            |
| <b>Voltage (V)</b>       | 12                       |
| <b>Environment</b>       | Indoor                   |

### OPTICAL

|                                     |             |
|-------------------------------------|-------------|
| <b>Light controller description</b> | Bare lamps  |
| <b>Aiming</b>                       | Directional |
| <b>Light distribution symmetry</b>  | Symmetric   |
| <b>Beam angle</b>                   | 8°          |

### ELECTRICAL

|                                 |               |
|---------------------------------|---------------|
| <b>Transformer availability</b> | Separate item |
| <b>Transformer mounting</b>     | Remote        |
| <b>Emergency</b>                | Without       |
| <b>Insulation class</b>         | Class III     |


### PHYSICAL


|                              |           |
|------------------------------|-----------|
| <b>Height (mm)</b>           | 67        |
| <b>Spot diameter (mm)</b>    | 57        |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 0,06      |



**LightLight® Pend/Ceiling-Spot 5|Short**  
designed by Hans Buschfeld

Spotlight to be installed on 12V  
pending or ceiling track system. Track  
adaptor integrated.

|   |          |                    |
|---|----------|--------------------|
|  | BU32400A | Anodised aluminium |
|  | BU32400B | Black              |
|  | BU32400P | Polished aluminium |
|  | BU32400W | White              |

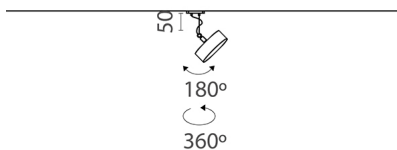

### CERTIFICATIONS

