

LIGHTLIGHT® PEND/CEILING-SHOP-V 100|DISC 70

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-70 BA15d 20/50W
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	24°, 8°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL

Length of rod (mm)	1000
Height (mm)	25
Spot diameter (mm)	74
Construction material	Aluminium
Weight (kg)	0,09




LightLight® Pend/Ceiling-Shop-V 100|Disc 70

designed by Hans Buschfeld

Table and counter luminaire to be installed on 12V pending or ceiling track system. Track adapter integrated.

● BU35505W	White
● BU35505A	Anodised aluminium
● BU35505B	Black
● BU35505P	Polished aluminium

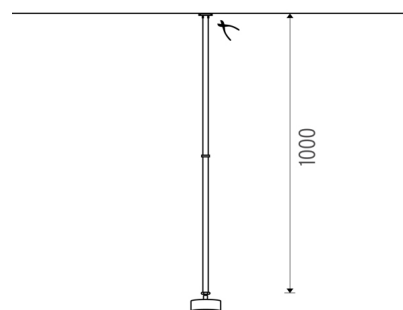

CERTIFICATIONS



LightLight® Pend/Ceiling-Shop-V 100|Disc 70 . Lamps



60.6369

QR-70

Lamp Watt:

20 W

Lamp category:

Halogen low voltage

Socket:

BA15d

Lamp angle:

24 °

Color temperature (K):

3000 °K

Catalog reference:

60.6369

Lamp type:

QR-70



60.6370

QR-70

Lamp Watt:

50 W

Lamp category:

Halogen low voltage

Socket:

BA15d

Lamp angle:

8 °

Color temperature (K):

3000 °K

Catalog reference:

60.6370

Lamp type:

QR-70



60.6371

QR-70

Lamp Watt:

50 W

Lamp category:

Halogen low voltage

Socket:

BA15d

Lamp angle:

24 °

Color temperature (K):

3000 °K

Catalog reference:

60.6371

Lamp type:

QR-70




LightLight® Pend/Ceiling-Shop-V 100|Disc 70

designed by Hans Buschfeld

Table and counter luminaire to be installed on 12V pending or ceiling track system. Track adapter integrated.

● BU35505W	White
● BU35505A	Anodised aluminium
● BU35505B	Black
● BU35505P	Polished aluminium

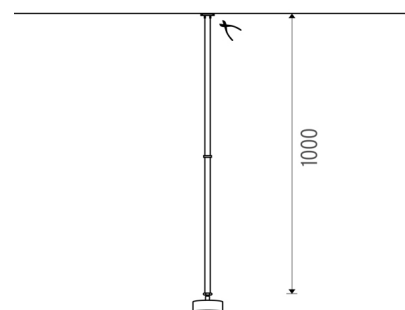

CERTIFICATIONS

