

LIGHTLIGHT® PEND/CEILING-SHOP-V 100|MINITUBE

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-CBC 25 clear/frosted GZ4 20/35W
Voltage (V)	12
Environment	Indoor

OPTICAL


Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	34°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL

Length of rod (mm)	1000
Height (mm)	49
Spot diameter (mm)	30
Construction material	Aluminium
Weight (kg)	0,06

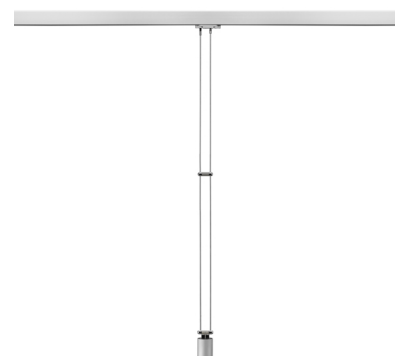


LightLight® Pend/Ceiling-Shop-V 100|Minitube


designed by Hans Buschfeld

Table and counter luminaire to be installed on 12V pending or ceiling track system. Track adapter integrated.

	BU35605A	Anodised aluminium
	BU35605B	Black
	BU35605P	Polished aluminium

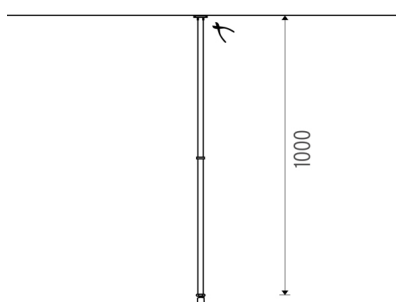

CERTIFICATIONS

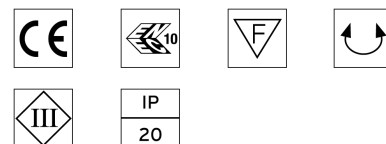

LightLight® Pend/Ceiling-Shop-V 100|Minitube . Lamps



BU62

QR-CBC 25

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
BU62

Lamp type:
QR-CBC 25



BU68

QR-CBC 25

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
44 °

Color temperature (K):
3000 °K

Catalog reference:
BU68

Lamp type:
QR-CBC 25



BU61

QR-CBC 25

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
21 °

Color temperature (K):
3000 °K

Catalog reference:
BU61

Lamp type:
QR-CBC 25



BU64

QR-CBC 25

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
BU64

Lamp type:
QR-CBC 25




LightLight® Pend/Ceiling-Shop-V 100|Minitube

designed by Hans Buschfeld

Table and counter luminaire to be installed on 12V pending or ceiling track system. Track adapter integrated.

	BU35605A	Anodised aluminium
	BU35605B	Black
	BU35605P	Polished aluminium

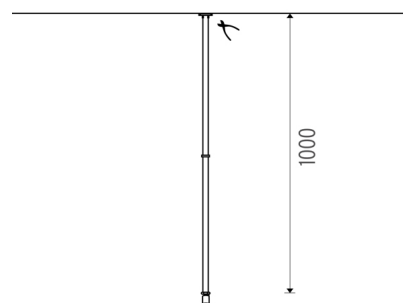

CERTIFICATIONS

