

LIGHTLIGHT® PEND-BALANCE 50|DISC 70

Number of heads	1
Mounting	LightLight® Pend
Lamps description	QR-70 BA15d 20/50W
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	24°, 8°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL


Height (mm)	25
Spot diameter (mm)	74
Construction material	Aluminium
Weight (kg)	0.12




LightLight® Pend-Balance 50|Disc 70
designed by Hans Buschfeld

Luminaire to be installed on 12V
pending track system. Track adapter
integrated.

● BU37525W	White
● BU37525A	Anodised aluminium
● BU37525B	Black
● BU37525P	Polished aluminium



CERTIFICATIONS

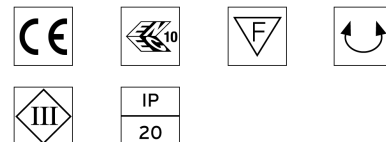

LightLight® Pend-Balance 50|Disc 70 . Lamps



60.6369

QR-70

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6369

Lamp type:
QR-70



60.6370

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6370

Lamp type:
QR-70



60.6371

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6371


Lamp type:
QR-70



LightLight® Pend-Balance 50|Disc 70
designed by Hans Buschfeld

Luminaire to be installed on 12V
pending track system. Track adapter
integrated.

	BU37525W	White
	BU37525A	Anodised aluminium
	BU37525B	Black
	BU37525P	Polished aluminium



CERTIFICATIONS

