

## LIGHTLIGHT® PEND-BALANCE 50|MR16

|                          |   |
|--------------------------|---|
| <b>Number of heads</b>   | 1                                       |
| <b>Mounting</b>          | LightLight® Pend                        |
| <b>Lamps description</b> | QR-CBC 51 clear/frosted GX5.3 20/35/50W |
| <b>Voltage (V)</b>       | 12                                      |
| <b>Environment</b>       | Indoor                                  |

### OPTICAL

|                                     |             |
|-------------------------------------|-------------|
| <b>Light controller description</b> | Bare lamps  |
| <b>Aiming</b>                       | Directional |
| <b>Light distribution symmetry</b>  | Symmetric   |
| <b>Beam angle</b>                   | 24°, 38°    |

### ELECTRICAL

|                                 |               |
|---------------------------------|---------------|
| <b>Transformer availability</b> | Separate item |
| <b>Transformer mounting</b>     | Remote        |
| <b>Emergency</b>                | Without       |
| <b>Insulation class</b>         | Class III     |


### PHYSICAL

|                              |           |
|------------------------------|-----------|
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 0,04      |




### LightLight® Pend-Balance 50|MR16 designed by Hans Buschfeld

Luminaire to be installed on 12V pending track system. Track adapter integrated.

 BU37620P

Polished aluminium



### CERTIFICATIONS



## LightLight® Pend-Balance 50|MR16 . Lamps



60.6392  
**QR-CBC 51**  
**Lamp Watt:**  
 20 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 10 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6392  
**Lamp type:**  
 QR-CBC 51



60.6359  
**QR-CBC 51**  
**Lamp Watt:**  
 50 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 24 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6359  
**Lamp type:**  
 QR-CBC 51



60.6360  
**QR-CBC 51**  
**Lamp Watt:**  
 50 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 38 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6360  
**Lamp type:**  
 QR-CBC 51




60.6361  
**QR-CBC 51**  
**Lamp Watt:**  
 50 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 60 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6361  
**Lamp type:**  
 QR-CBC 51



60.6393  
**QR-CBC 51**  
**Lamp Watt:**  
 20 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 24 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6393  
**Lamp type:**  
 QR-CBC 51




60.6394  
**QR-CBC 51**  
**Lamp Watt:**  
 20 W  
**Lamp category:**  
 Halogen low voltage  
**Socket:**  
 GX5.3  
**Lamp angle:**  
 38 °  
**Color temperature (K):**  
 3000 °K  
**Catalog reference:**  
 60.6394  
**Lamp type:**  
 QR-CBC 51

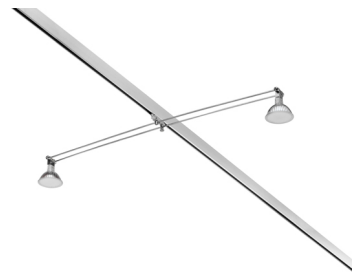


### LightLight® Pend-Balance 50|MR16 designed by Hans Buschfeld

Luminaire to be installed on 12V  
 pending track system. Track adapter  
 integrated.

 BU37620P Polished aluminium



### CERTIFICATIONS

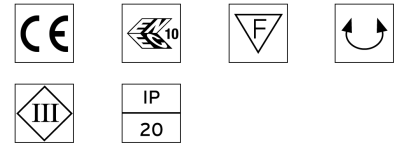

## LightLight® Pend-Balance 50|MR16 . Lamps



60.6395

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6395

**Lamp type:**  
QR-CBC 51



60.6355

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6355

**Lamp type:**  
QR-CBC 51



60.6356

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6356

**Lamp type:**  
QR-CBC 51



60.6357

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6357

**Lamp type:**  
QR-CBC 51



BU19

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU19

**Lamp type:**  
QR-CBC 51



BU20

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage


**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K


**Catalog reference:**  
BU20

**Lamp type:**  
QR-CBC 51

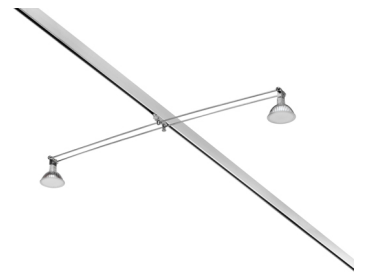


**LightLight® Pend-Balance 50|MR16**  
designed by Hans Buschfeld

Luminaire to be installed on 12V  
pending track system. Track adapter  
integrated.

 BU37620P

Polished aluminium



### CERTIFICATIONS



# FLOS

## LightLight® Pend-Balance 50|MR16 . Lamps



BU21

**QR-CBC 51**

**Lamp Watt:**

50 W

**Lamp category:**

Halogen low voltage

**Socket:**

GX5.3

**Lamp angle:**

60 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

BU21


**Lamp type:**

QR-CBC 51




**LightLight® Pend-Balance 50|MR16**  
designed by Hans Buschfeld

Luminaire to be installed on 12V  
pending track system. Track adapter  
integrated.

 BU37620P

Polished aluminium



### CERTIFICATIONS

