


IN-FINITY 100 RECESSED NO TRIM 3000K GENERAL LIGHTING

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 34,1W/m 3915 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1125 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Recessed No Trim 3000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	109°



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium

- N10N053G30 565mm - 1578lm White
- N10N083G30 845mm - 2367lm White
- N10N113G30 1125mm - 3156lm White
- N10N143G30 1405mm - 3945lm White
- N10N163G30 1690mm - 4734lm White
- N10N193G30 1970mm - 5523lm White
- N10N253G30 2530mm - 7101lm White
- N10N303G30 3095mm - 8679lm White
- N10NFC3G30 Flat Corner - 3156lm White
- N10NDC3G30 Dihedral Corner - 3156lm White
- N10NEM3G30 Emergency - 3945lm White



CERTIFICATIONS

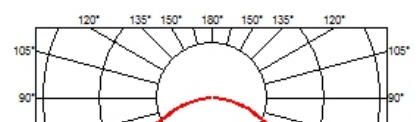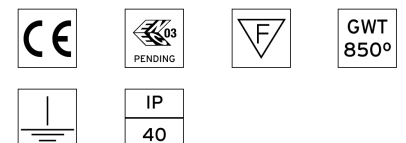

In-Finity 100 Recessed No Trim 3000K General Lighting . Accessories

Structural



08.9054.40

Metal cover. Recessed No Trim. 100 mm

Metal cover for the different profiles. 2 unit kit.

In-Finity 100 Recessed No Trim 3000K General Lighting . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Top LED





In-Finity 100 Recessed No Trim 3000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N10N053G30 565mm - 1578lm White
- N10N083G30 845mm - 2367lm White
- N10N113G30 1125mm - 3156lm White
- N10N143G30 1405mm - 3945lm White
- N10N163G30 1690mm - 4734lm White
- N10N193G30 1970mm - 5523lm White
- N10N253G30 2530mm - 7101lm White
- N10N303G30 3095mm - 8679lm White
- N10NFC3G30 Flat Corner - 3156lm White
- N10NDC3G30 Dihedral Corner - 3156lm White
- N10NEM3G30 Emergency - 3945lm White



CERTIFICATIONS

