


## IN-FINITY 100 RECESSED NO TRIM 4000K GENERAL LIGHTING

<b>Number of heads</b>	1
<b>Mounting</b>	Recessed No Trim
<b>Lamps description</b>	Top LED 34,1W/m 4228 lm/m 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1125 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



### In-Finity 100 Recessed No Trim 4000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	109°



### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I



### PHYSICAL

<b>Recessed depth (mm)</b>	135
<b>Construction material</b>	Aluminium

- N10N054G30 565mm - 1555lm White
- N10N084G30 845mm - 2333lm White
- N10N114G30 1125mm - 3111lm White
- N10N144G30 1405mm - 3889lm White
- N10N164G30 1690mm - 4667lm White
- N10N194G30 1970mm - 5445lm White
- N10N254G30 2530mm - 7001lm White
- N10N304G30 3095mm - 8557lm White
- N10NFC4G30 Flat Corner - 3111lm White
- N10NDC4G30 Dihedral Corner - 3111lm White
- N10NEM4G30 Emergency - 3889lm White



### CERTIFICATIONS

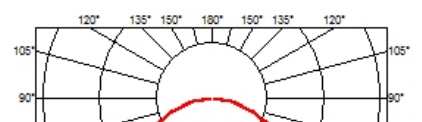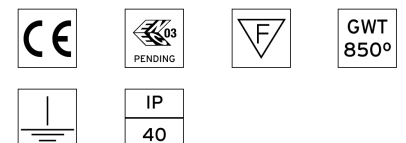

## In-Finity 100 Recessed No Trim 4000K General Lighting . Accessories

### Structural



08.9054.40

#### Metal cover. Recessed No Trim. 100 mm

Metal cover for the different profiles. 2 unit kit.

## In-Finity 100 Recessed No Trim 4000K General Lighting . Lamps



#### Top LED

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

Top LED





### In-Finity 100 Recessed No Trim 4000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N10N054G30 565mm - 1555lm White
- N10N084G30 845mm - 2333lm White
- N10N114G30 1125mm - 3111lm White
- N10N144G30 1405mm - 3889lm White
- N10N164G30 1690mm - 4667lm White
- N10N194G30 1970mm - 5445lm White
- N10N254G30 2530mm - 7001lm White
- N10N304G30 3095mm - 8557lm White
- N10NFC4G30 Flat Corner - 3111lm White
- N10NDC4G30 Dihedral Corner - 3111lm White
- N10NEM4G30 Emergency - 3889lm White



### CERTIFICATIONS

