


IN-FINITY 70 RECESSED NO TRIM 4000K MICRO-PRISMATIC DIFFUSER

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 23,1W/m 3091 lm/m 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser
designed by FLOS Architectural

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	72°

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I



- N70N054U30B 565mm - 818lm White
- N70N084U30B 845mm - 1227lm White
- N70N114U30B 1125mm - 1636lm White
- N70N144U30B 1405mm - 2045lm White
- N70N164U30B 1690mm - 2454lm White
- N70N194U30B 1970mm - 2862lm White
- N70N254U30B 2530mm - 3680lm White
- N70N304U30B 3095mm - 4498lm White
- N70NFC4U30B Flat Corner - 1636lm White
- N70NDC4U30B Dihedral Corner - 1636lm White
- N70NEM4U30B Emergency - 2045lm White

PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium



CERTIFICATIONS

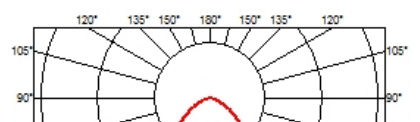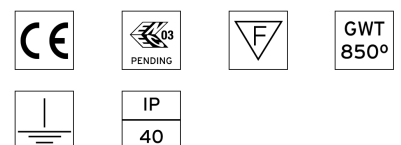

In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser . Accessories


Structural



08.9052.40

Metal cover. Recessed No Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N70N054U30B 565mm - 818lm White
- N70N084U30B 845mm - 1227lm White
- N70N114U30B 1125mm - 1636lm White
- N70N144U30B 1405mm - 2045lm White
- N70N164U30B 1690mm - 2454lm White
- N70N194U30B 1970mm - 2862lm White
- N70N254U30B 2530mm - 3680lm White
- N70N304U30B 3095mm - 4498lm White
- N70NFC4U30B Flat Corner - 1636lm White
- N70NDC4U30B Dihedral Corner - 1636lm White
- N70NEM4U30B Emergency - 2045lm White



CERTIFICATIONS

