

Atlas Fix
Atlas Mix (Round - Square - 150)

DOXIS
LIGHTING FACTORY

- Instructions:**
1. Drill a hole in the ceiling
 2. Connect LED to driver
 3. Connect 230V to driver
 4. Insert driver and spot into ceiling


Forward voltages and nominal drive currents are mentioned on the label supplied with the product or can be found in the technical datasheet of the product.

Always use the correct driver.

Always install the driver according to the wiring schematics supplied with the driver.

Always check if multi-current drivers are set to the correct output current.

Doxis Lighting Factory cannot be held responsible for damage caused by using the wrong driver.



Atlas Fix: Ø95mm


Atlas Mix Round: Ø114mm

Atlas Mix Square: 114x114mm

Atlas Mix 150: Ø114-145mm


1

Connect LED
Red wire: +
Black wire: -

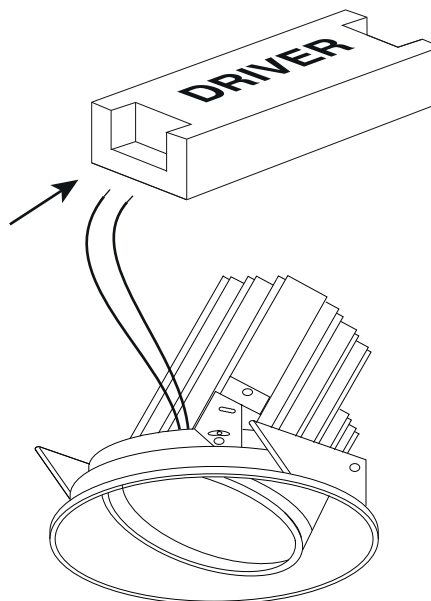


2

Connect 230V

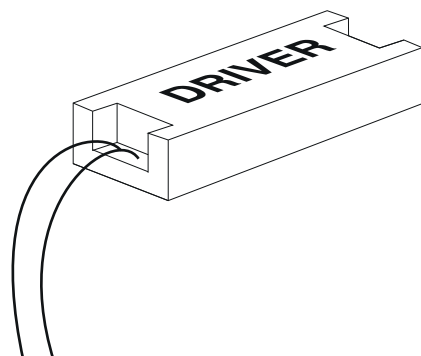

3

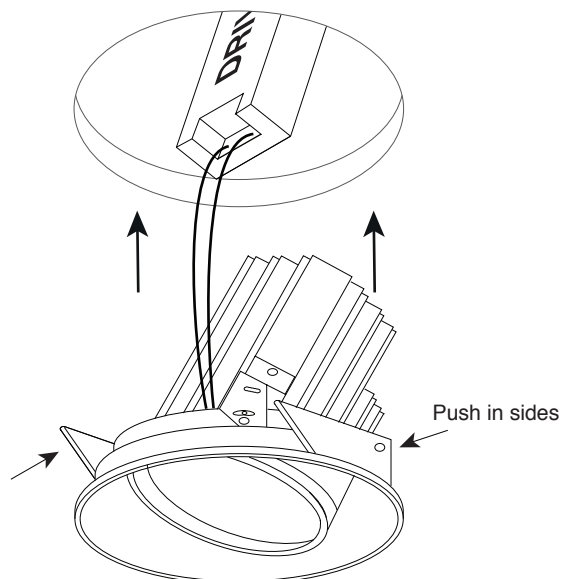

Push in sides

4

⚠ Attention!!

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place.
Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.

Air circulation notice:
Do not toplod with insulation materials

