

# COMPENDIUM CIRCLE

design Daniel Rybakken

**LUCE  
PLAN**

Type: Suspension

Lamps: Ø 72 cm: LED 52W 2700/3000K<sup>(\*)</sup> CRI 90  
black: 1.788 lm, brass: 2.133 lm, alu: 2.246 lm  
Ø 110 cm: LED 75W 2700/3000K<sup>(\*)</sup> CRI 90  
black: 2.503 lm, brass: 2.958 lm, alu: 3.145 lm  
Ø 200 cm: LED 125W 2700/3000K<sup>(\*)</sup> CRI 90  
black: 4.292 lm, brass: 5.071 lm, alu: 5.392 lm

Product use: Indoor

Materials: Profile in painted extruded aluminum

Colors: Black, brass, aluminum

Description: Compendium family, Circle is a lamp with a poetic nature and an essential design, whose lightness is sustained by LED technology, installed to permit direct emission when pointed downward, or diffused light when aimed upward.

Rating:   

Marking: 

Reference code: Structure 3000K

|        |              |       |
|--------|--------------|-------|
| D81C07 | 1D810C070020 | alu   |
|        | 1D810C070001 | black |
|        | 1D810C070030 | brass |
| D81C11 | 1D810C110020 | alu   |
|        | 1D810C110001 | black |
|        | 1D810C110030 | brass |
| D81C20 | 1D810C200020 | alu   |
|        | 1D810C200001 | black |
|        | 1D810C200030 | brass |

Structure 2700K

|         |              |       |
|---------|--------------|-------|
| D81C07W | 1D810C07W020 | alu   |
|         | 1D810C07W001 | black |
|         | 1D810C07W030 | brass |
| D81C11W | 1D810C11W020 | alu   |
|         | 1D810C11W001 | black |
|         | 1D810C11W030 | brass |
| D81C20W | 1D810C20W020 | alu   |
|         | 1D810C20W001 | black |
|         | 1D810C20W030 | brass |

Ceiling rose  

|            |              |              |                         |
|------------|--------------|--------------|-------------------------|
| for D81C07 | <b>D81/4</b> | 1D810/400000 | 60W dimmable push/DALI  |
| for D81C11 | <b>D81/5</b> | 1D810/500000 | 100W dimmable push/DALI |
| for D81C20 | <b>D81/6</b> | 1D810/600000 | 150W dimmable push/DALI |




Remote drivers

|            |               |              |                         |
|------------|---------------|--------------|-------------------------|
| for D81C07 | <b>D81/10</b> | 1D810/100000 | 60W dimmable push/DALI  |
| for D81C11 | <b>D81/11</b> | 1D810/110000 | 100W dimmable push/DALI |
| for D81C20 | <b>D81/12</b> | 1D810/120000 | 150W dimmable push/DALI |

|       |              |              |                                                                       |
|-------|--------------|--------------|-----------------------------------------------------------------------|
| Cover | <b>D81/8</b> | 1D810/800002 | optional remote drivers<br>cover/plate for multiple<br>configurations |
|-------|--------------|--------------|-----------------------------------------------------------------------|

<sup>(\*)</sup> Power consumption by device

www.luceplan.com

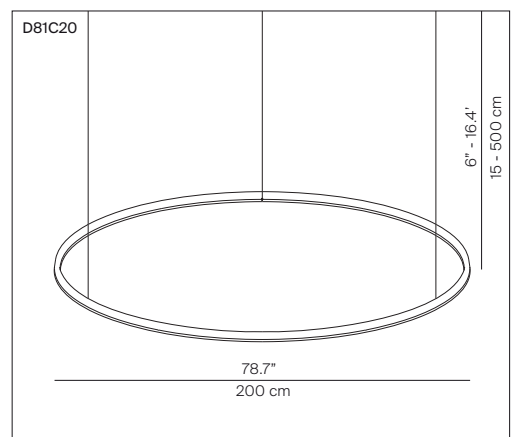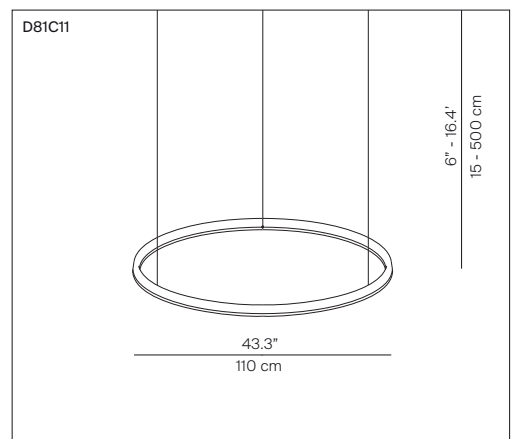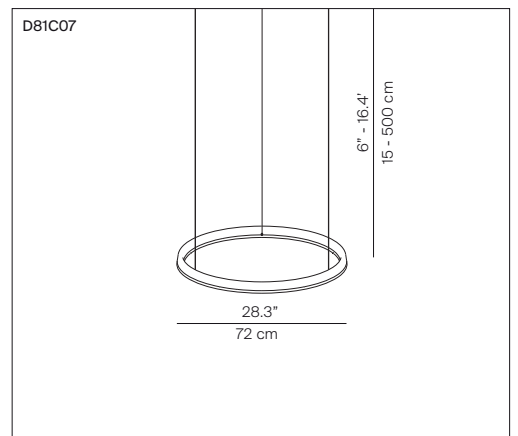

# COMPENDIUM CIRCLE

design Daniel Rybakken



Distances between devices to avoid rubbing steel cable on lamp and the excessive tension of the cable.

