



Suspension Type:

Light source: 120 cm version (dimmable push/DALI)

direct version

LED 54W, 3000K CRI 80

direct/indirect version (only for horizontal configuration)

LED 54W + 29W, 3000K CRI 80

180 cm version (dimmable push/DALI)

direct version

LED 80W, 3000K CRI 80

direct/indirect version (only for horizontal configuration)

LED 80W + 46W, 3000K CRI 80

Indoor Product use:

Material: Lamp body in aluminium

Sound-absorbing panel in molded pet

structure: natural grey aluminium Colors:

panel: White/Black, White/Blue, White/Beige


Description: A linear LED lamp for the workplace, the technical LED lighting,


> ideal for work, is directly downward by the central line, with the possibility of two beams, depending on lighting requirements.

Insulation class:









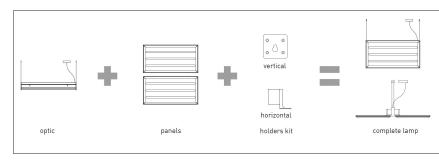







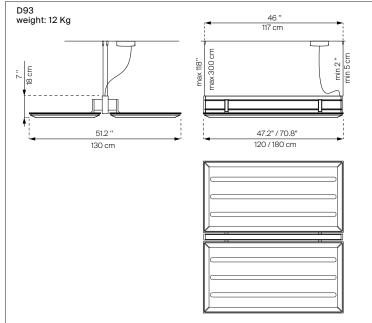





Reference code: Structure 120 cm

D93SDDC 1D930SDDC020 (direct light) alu

D93SDIC 1D930SDLC020 (direct/indirect light) alu

D93SFIC 1D930SFIC020 (direct/indirect light with anti-glare) alu

1.890 lm (downlight) and 3.096 lm (uplight)

Panels 120 cm

D93/1 1D93010000A1 white/black

1D93010000A2 white/blue 1D93010000A4 white/beige

Structure 180 cm

D93SDDL 1D930SDDL020 alu

D93SDIL 1D930SDLL020 (direct/indirect light) alu

D93SFIL 1D930SFIL020 (direct/indirect light with anti-glare) alu

2.835 lm (downlight) and 5.161 lm (uplight)

Panels 180 cm

D93/3 1D93030000A1 white/black

1D93030000A2 white/blue 1D93030000A4 white/beige

Vertical support kit

D93/5 1D9305000020 alu (kit 4 supports) D93/7 1D9307000020 alu (kit 6 supports)

Orizzontal support kit

D93/6 1D9306000020 alu (kit 4 supports) D93/8 1D9308000020 alu (kit 6 supports)







White/Black

White/Blue

White/Beige