


Smart Lotis (diffuse) 115 IP54 LED GE

127520XX - 127521XX - 127522XX - 127523XX - 127524XX - 127525XX -
127526XX - 127527XX - 127528XX - 127530XX - 127531XX - 127532XX -
127533XX - 127534XX - 127535XX - 127536XX - 127537XX - 127538XX


Lamptype : LED array

1

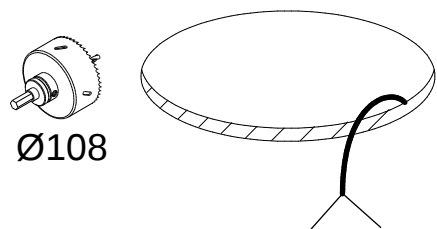

Ø108

350mA - min 29,1Vf - max 33,7Vf - 11W
500mA - min 29,9Vf - max 34,7Vf - 16,2W
700mA - min 31,0Vf - max 35,8Vf - 23,4W

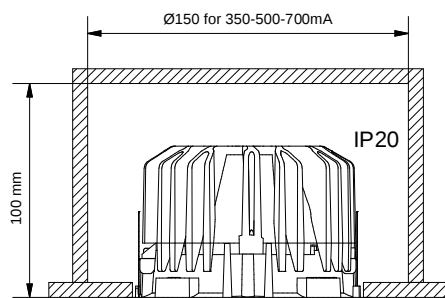


IP54




Replace protective shield when broken
The luminaire shall only be used complete
with its protective shield
Reference numbers:
IP55 glass clear art.1009392
Diffuse poly.for led art.1009467

2

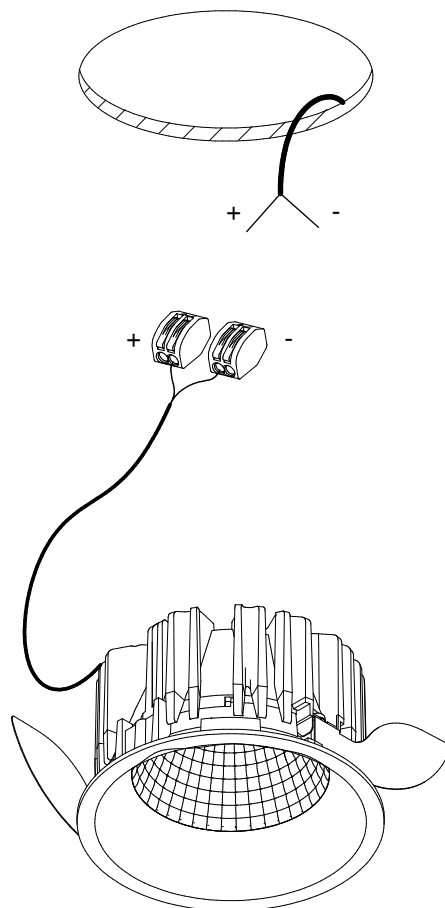


3

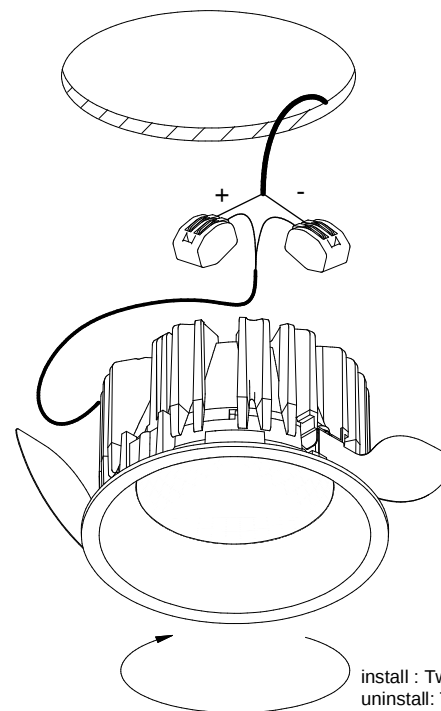

install : Twist clockwise
uninstall: Twist counterclockwise

4

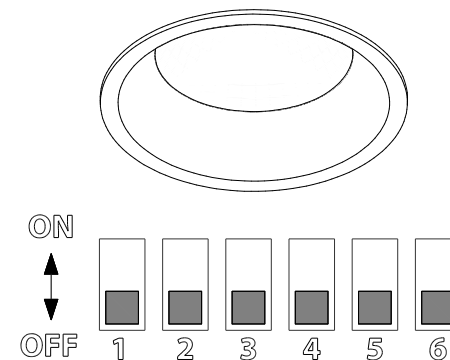

check dipswitch settings on driver



Push Dim max 5 drivers on 1 push button

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

CAN BE USED WITH

drivers
see driver matrix - latest version on website
www.supermodular.com or check sales contact

Recessed ring

12810230 Smart recessed ring ø115

Surface box

128000xx Smart surface box dia 115 GI for 1 LED GE
128001xx Smart surface box dia 115 1-10V/pushdim GI for 1 LED GE
128002xx Smart surface box dia 115 dali/pushdim GI for 1 LED GE
128010xx Smart surface box dia 115 GI for 2x LED GE
128011xx Smart surface box dia 115 1-10V/pushdim GI for 2x LED GE
128012xx Smart surface box dia 115 dali/pushdim GI for 2x LED GE

Gypkit - conbox

12290530 Gypkit 190X190XDIA108
10889830 Conbox outer dim. 190x192x130

Mask

12810009 Smart mask ø115 1x Whstr
12810032 Smart mask ø115 1x Blstr
12810046 Smart mask ø115 1x Gold
12810109 Smart mask ø115 2x Whstr
12810132 Smart mask ø115 2x Blstr
12810146 Smart mask ø115 2x Gold

Reflector

11949930 Reflector DIA 80 LED Spot
11949730 Reflector DIA 80 LED Flood



IP54



09/02/2017 V6