

WALKLINE

WALKLINE is a walk and drive-over LED linear system for outdoor. Natural anodized aluminium profile with a resin opal surface allows a homogeneous light emission.

Walkline is available in different lengths. Dimmable 1-10V, DALI or DMX.

Installation through wall recessed box (included).



0,50M | 4000K

LAMPING

Source	Linear LED
Total power	7,5W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	325lm
Initial luminaire efficacy	> 40lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x50,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

Codes

BWLK0205G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 50x3x9 cm / Gross weight: 3,5 kg

Certificazioni

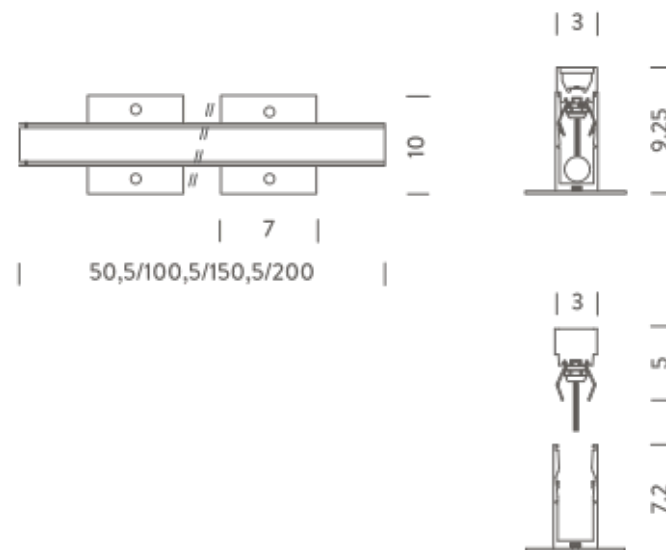

0,50M | 6000K

LAMPING

Source	Linear LED
Total power	7,5W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x50,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

Codes

BWLK0205G260AA


Structure

grey

PACKAGE

Package 01 Dimension: 50x3x9 cm / Gross weight: 3,5 kg

Certificazioni

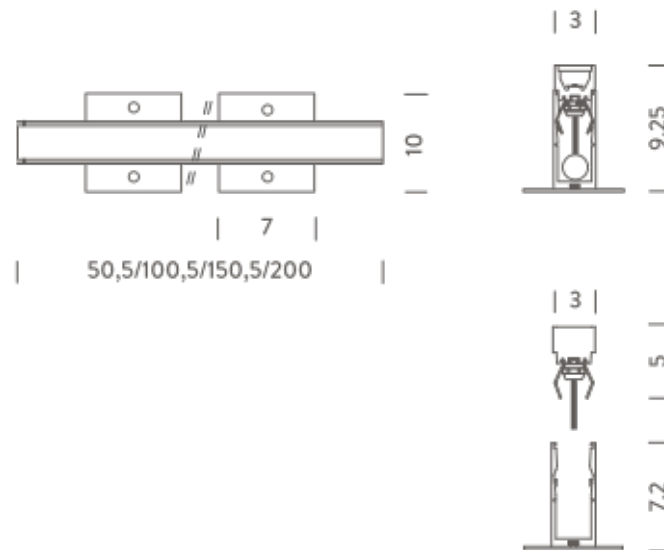

1M | 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Initial luminaire efficacy	> 40lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 100x3x9 cm / Gross weight: 5,25 kg

Certificazioni

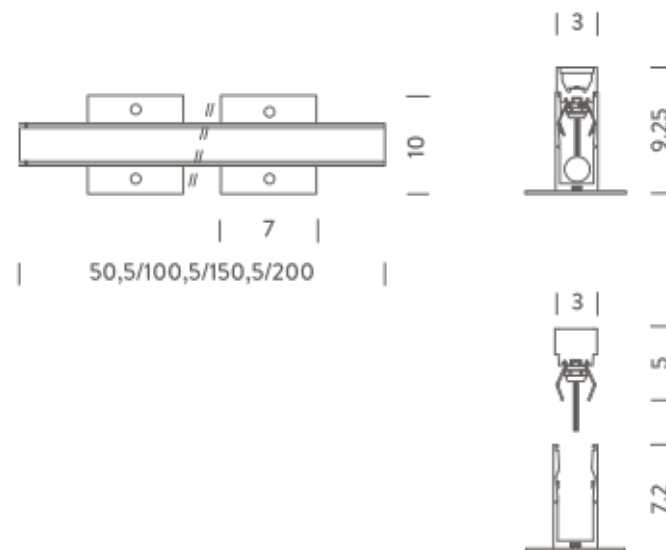

1M | 6000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G260AA

Structure


grey

PACKAGE

Package 01

Dimension: 100x3x9 cm / Gross weight: 5,25 kg

Certificazioni

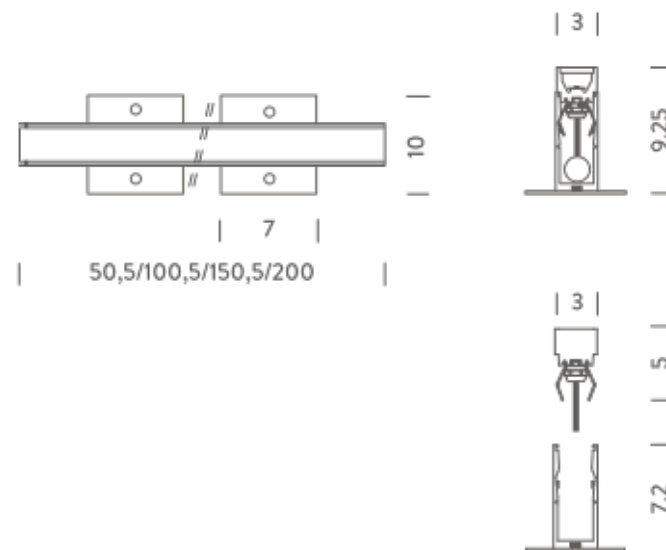

1,5M | 4000K

LAMPING

Source	Linear LED
Total power	22,5W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	975lm
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x150,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 150x3x9 cm / Gross weight: 1,75 kg

Certificazioni

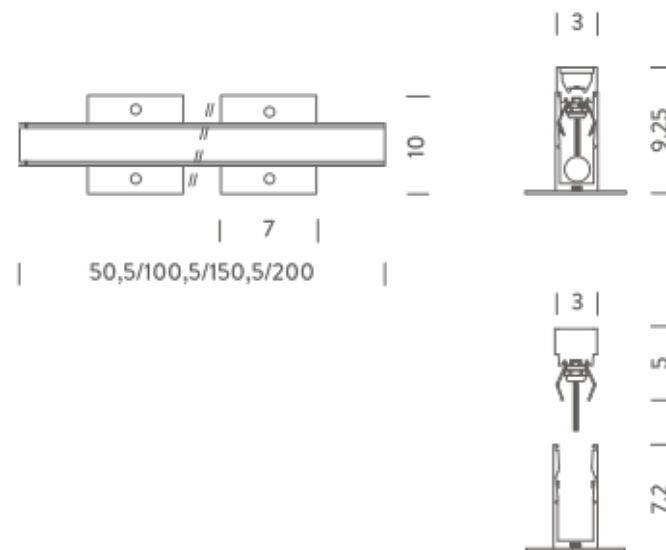

1,5M | 6000K

LAMPING

Source	Linear LED
Total power	22,5W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,255x150,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included; certified 500kg static load, 3500kg dynamic load
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G260AA



Structure

grey

PACKAGE

Package 01 Dimension: 150x3x9 cm / Gross weight: 0,55 kg

Certificazioni

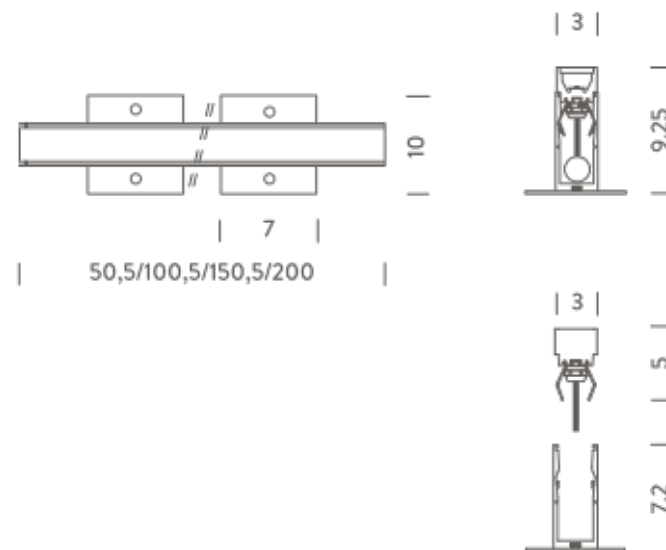

2M | 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x200,5cm
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

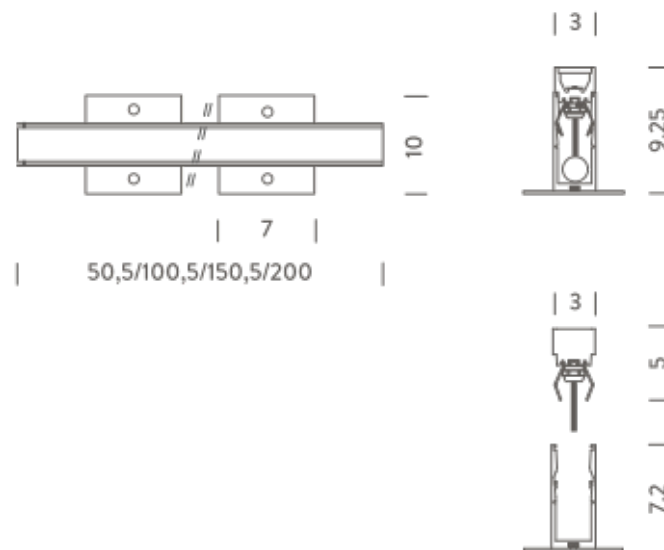

2M | 6000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	6000K
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	3,1x9,25x200,5cm
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G260AA

Structure

grey

PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

