



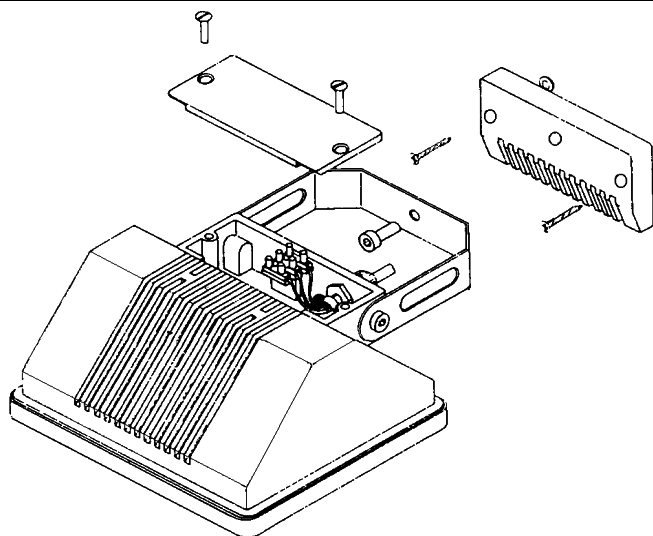

WIP ALOGENO

Per lampada alogena 300W R7S-15

ART. S.4311



Per lampada fluorescente compatta 26W-T GX24d-3

ART. S.4319



CARATTERISTICHE TECNICHE

Struttura in alluminio pressofuso. Staffa in ferro.

Vetro temprato ed acidato

Viteria in acciaio inox A4

Guarnizioni in silicone

Riflettore in alluminio

Verniciatura a polveri con alta resistenza alla corrosione e pretrattamento di fosfocromatazione

Portalamпада a norme Europee

CLASSE I IP 65

ISTRUZIONI DI MONTAGGIO

Posizionare la lampada a parete o a soffitto (per la posizione a parete l'inclinazione rispetto al piano orizzontale non deve essere superiore a 4°)

Aprire il vano elettrico. Introdurre il cavo di alimentazione (D.min 6,5mm - Dmax 10mm) e serrare a fondo il pressacavo

Eseguire il cablaggio collegandosi all'apposito morsetto; richiudere il vano elettrico.

Aprire l'apparecchio introdurre la lampadina adatta e richiudere l'apparecchio.

NOTE

Non superare la potenza massima indicata nei dati di targa.


L'apparecchio deve essere collegato alla messa a terra

Usare cavi tipo ◀ HAR ▶ Dmin 6,5mm - Dmax 10mm

Togliere tensione prima di effettuare manutenzioni

In caso di rottura del vetro, sostituirlo prima di riutilizzare l'apparecchio

Non entrare attraverso il pressacavo con fili singoli ma con cavo in doppia guaina



Distanza minima dalla superficie da illuminare = 0,8m




Apparecchio idoneo al montaggio su superfici normalmente infiammabili

L'installazione deve essere eseguita da personale qualificato secondo le norme di settore

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio e per la sicurezza delle persone, pertanto esse vanno conservate



WIP WALL BRACKET

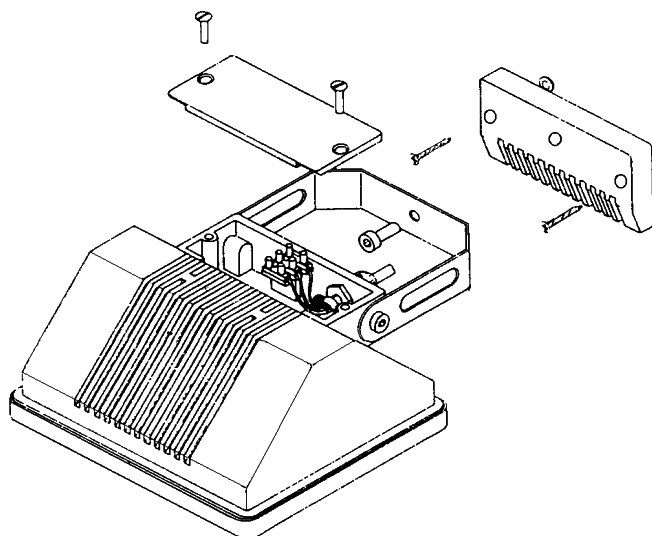

WIP WALL BRACKET

for halogen lamp 300W R7S-15

ART. S.4311



for compact fluorescent lamp 26W-T GX24d-3

ART. S.4319



TECHNICAL CHARACTERISTICS:

Body and base in die cast aluminium. Stirrup in steel.

Tempered glass.

A4 stainless steel screws.

Silicone gaskets.

Pre-phosphocromatation treatment and powder paint with high corrosion resistance

Aluminium reflector

Lampholders in compliance with the European Standards

CLASS I PROTECTION LEVEL : IP 65

ASSEMBLING INSTRUCTIONS:

Fit the fitting to the required surface.

Open the electrical supply box and the fitting

Insert the supply cable (Dmin 6,5mm - Dmax 10mm) through the cable gland

Connect the supply cable to the electrical supply box.

Insert the correct lamp and then close the fitting.

RECOMMENDATIONS:

Do not exceed the maximum wattage-see internal label

The fitting must be earthed


Use ◀ HAR ▶ cable

Disconnect the supply before effecting the maintenance

In case of glass damage, replace it before using the fitting.

Do not enter with single wires even if protected with plastic tape

They have to be separated inside the connection box



Maintain a minimum distance of 0,8m from the object or surface to light



The fitting is suitable to the mounting on normal inflammable surfaces

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations

It is very important to follow these instructions to enable the fitting to be installed correctly. Please retain for information.

