


TECHNICAL DATA SHEET ART. C.8122N - GHOST HORIZONTAL

Version is available on request

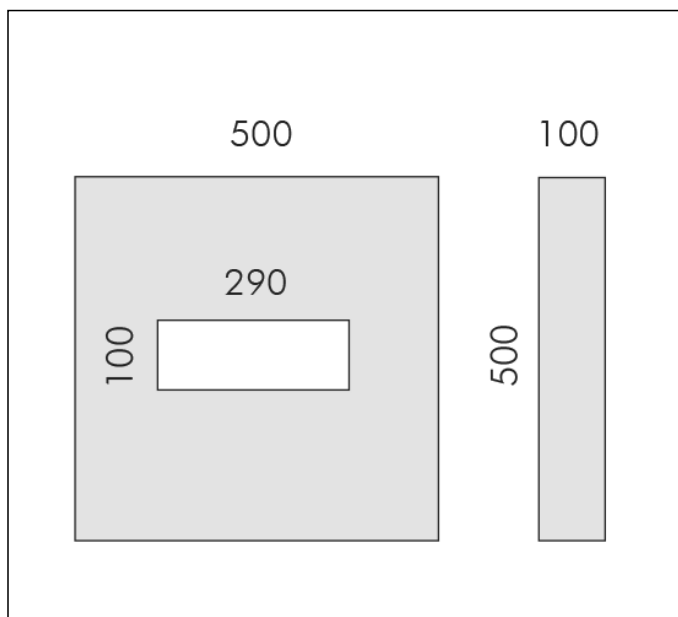


MODULES LED 4000K 230V 950lm CRI 80

Rated luminaire luminous flux: 530lm

Rated input power: 10W

Luminaire efficacy: 53lm/W

Electronic ballast 220÷230V 50-60Hz

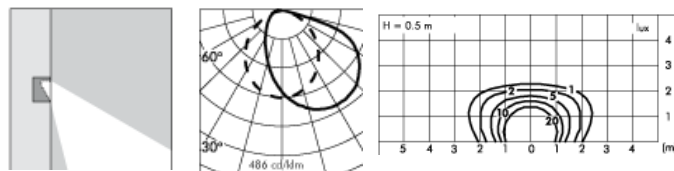

* Photometric measured using WHITE LED 3000K



PRODUCT TYPE

Wall mounted luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Ghost for insulation panel may be installed inside the exterior insulating panel. The degree of insulation of the house will stay unchanged for it is manufactured of the same type of polystyrene insulation. Attention should be paid though to the positioning of the corrugated tube for electrification. The height of Ghost for insulation panel has been designed to take on standard AED35 (50cm) insulating blocks while the thickness (10 cm) facilitates the integration in insulating panels with the same or greater thickness. The cavity is pre-finished and ready for painting. After installation the finish of the wall will proceed as usual: 1. Lay the grid, first levelling; 2. Carve the grid at the Ghost's cavity; 3. Second levelling and possible whitening; 4. At the end of the work install the lighting body. Mechanical resistance IK 06

LIGHTING PERFORMANCE

Toughened glass diffuser. LOR --

WIRING

Supplied with a pre-wired 0.3m H05RN-F cable. Isolation: CLASS I . Available colours: Cast cement. Weight: 1.3 Kg Glow Wire test: --

L.E.D circuit included.

GHOST PATENT PENDING, REGISTERED DESIGN

This luminaire contains built-in LED modules with energy class: A, A+, A++. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user (Regulation UE 874/2012).

LED circuit boards are engineered accordingly to actual Lumen Maintenance regulation (LM80) and Technical Memorandum (TM21) where uniformity and quality of light is 50.000 hours referred to L70 B20 Ta 25°C.

Lifecycle refers to LED circuit boards only, all others components of the luminaire are excluded.