

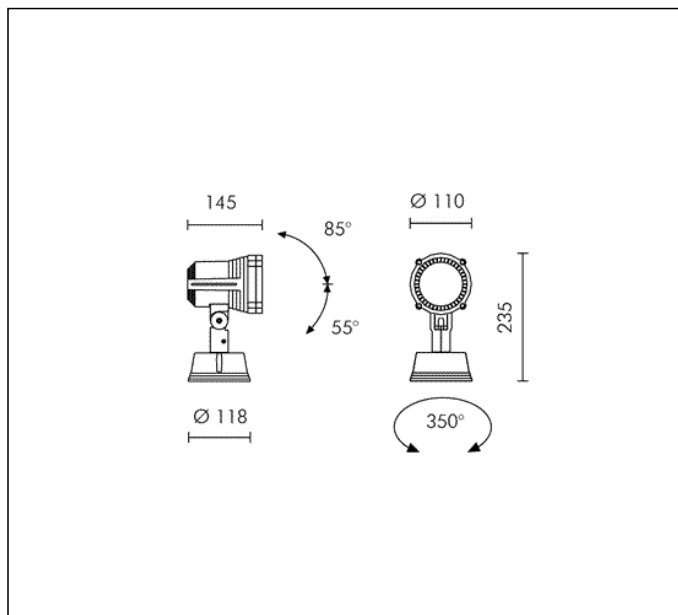


## TECHNICAL DATA SHEET ART. S.3560 - MINITECHNO SPOT

Available until 31/12/2017 but subject to stock levels



QPAR25 75W E27  
 Rated luminaire luminous flux: 866lm  
 Rated input power: 75W  
 Luminaire efficacy: 12lm/W (LOR: --)  
 220÷240V 50/60Hz



h(m)	8°		28°	
	Ø(m)	E(lx)	Ø(m)	E(lx)
2	0.30	1288	1.02	441
4	0.60	322	2.04	110
6	0.90	143	3.06	49
8	1.20	80	4.08	28
10	1.50	52	5.10	18



### PRODUCT TYPE

Projector. IP rating IP 65

### MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Pre treated Silicone Gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. 4 mm thick tempered glass diffuser. Mechanical resistance IK 06 Maximum load capacity --

### LIGHTING PERFORMANCE

The lathed anodized reflector is composed of 99,98% pure anodized aluminium with a bright polish finish (with HIT lamp version). LOR --

### INSTALLATION AND MAINTENANCE

The projector is supplied with graduated ferrules on both sides of the fitting. Power supply connection takes place by means of a disconnecting switch. This facilitates installation on walls because you can attach the base and do the wiring, positioning the complete unit at the end of the installation.

### WIRING

Single cable entry. Isolation: CLASS I . Available colours: Aluminium grey (cod.14), Anthracite grey (cod.24). Weight: 1.5 Kg Glow Wire test: 850°C

Lamp not included.

This luminaire is compatible with bulbs of the energy classes: D (Regulation UE 874/2012).

## TECHNICAL DATA SHEET ART. S.3560 - MINITECHNO SPOT ACCESSORIES




**S.3550  
PROTECTIVE GRILL**  
In die-cast aluminium. To be installed instead of the aluminium ring holder.



**S.3553  
VISOR**  
In die-cast aluminium. To be installed instead of the aluminium ring holder.



**S.3554  
STAKE IN POLYPROPYLENE**  
Colour: black (code 09)  
Total length = 420 mm.  
The 90 mm upper part must stay out of the ground level, according with the norms.  
( not suitable for REEF bollard versions )



**S.3504  
WIDE BEAM LENS**  
It enlarges the standard beam:  
It enlarges the standard beam from 28° to ~ 50°.



**S.3502  
ELLIPSOIDAL BEAM LENS**  
It modifies the standard beam:  
For versions with 8° reflector. It modifies the standard beam from 8° to ~ 12°x56°.

## Further information

### FIXING BASE

