



TECHNICAL DATA SHEET ART. S.5278 - REEF MUSICAL BOLLARD

Available until 31/12/2017 but subject to stock levels

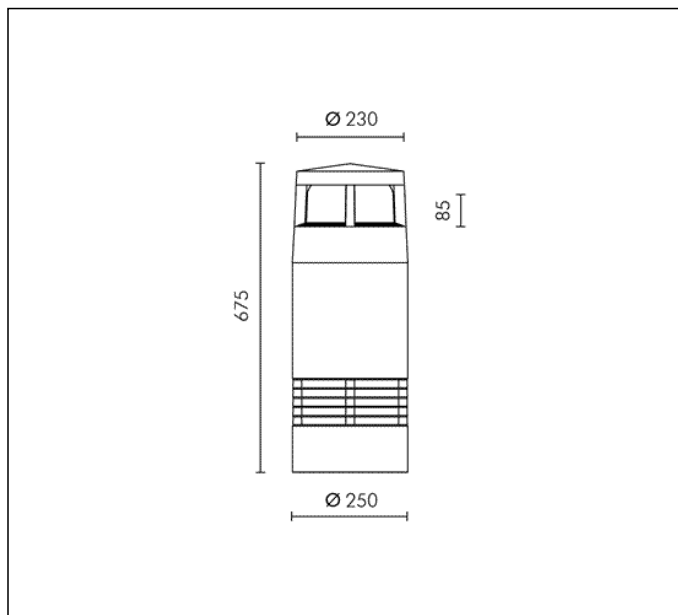

HIT-CRI 70W CLEAR G12 6600lm
 Rated luminaire luminous flux: 2838lm
 Rated input power: 84W
 Luminaire efficacy: 34lm/W (LOR: 42%)
 Magnetic transformer 230÷240V 50Hz
 EEI=A3, LOSSES=12.2W

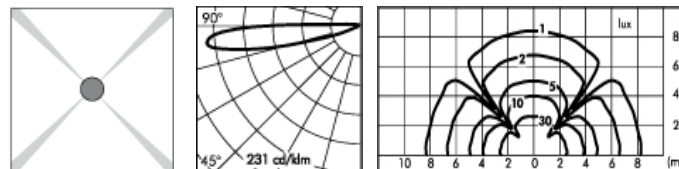

CE □ ⚡ IP 65 A+

PRODUCT TYPE

Musical Bollard fitting. IP rating IP 65

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Pre treated Silicone Gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. Mechanical resistance IK 10

LIGHTING PERFORMANCE

99.98% pure anodized aluminium double reflectors. Polycarbonate lens transparent with controlled downward light emission for avoiding any glare, UV-stabilised and vandalproof. Lamp fixed position. LOR 42% Compact electronic ballast to guarantee better lamp stability, lifetime and reduced energy consumption.

SPEAKER CHARACTERISTICS

REEF bollard and omnidirectional outdoor speaker with 30W RMS loudspeaker system and 100V 20W transformer. POSSIBLE CONNECTIONS: 1) To a standard stereo system for maximum 4 bollards; 2) To a 100V audio system for more than 4 bollards. 2 way omnidirectional outdoor speaker with 5" woofer and dome tweeter with 3 kHz crossover frequency. Operating range: 65Hz - 17.000Hz.

Dispersion in the middle wave range: 360° horizontal - 45° vertical. Sensitivity 1W/1m 82dB. Input: 8 ohm 30W 100V 20W 100V 10W 100V 5W

WIRING

Double cable entries with PG16 (Ø 10÷14 mm) cable glands. Isolation: CLASS II. Available colours: Aluminium grey (cod.14). Weight: 20.2 Kg Glow Wire test: 850°C

Lamp included.

This luminaire is compatible with bulbs of the energy classes: A+. The luminaire is sold with a bulb of the energy class: A+ (Regulation UE 874/2012).

TECHNICAL DATA SHEET ART. S.5278 - REEF MUSICAL BOLLARD ACCESSORIES



S.5203

FLANGE FOR GROUND APPLICATION

Flange \varnothing 250mm h 225mm to be fixed in concrete with stainless steel screws for fixing in the ground.
Footstall dimension can be calculated according to your country norms and ground properties.

Further information

FIXING BASE

