




PIREQ 77

square, downlight, brushed aluminium, 6W, 38°, 3000K, incl. driver, clip spring

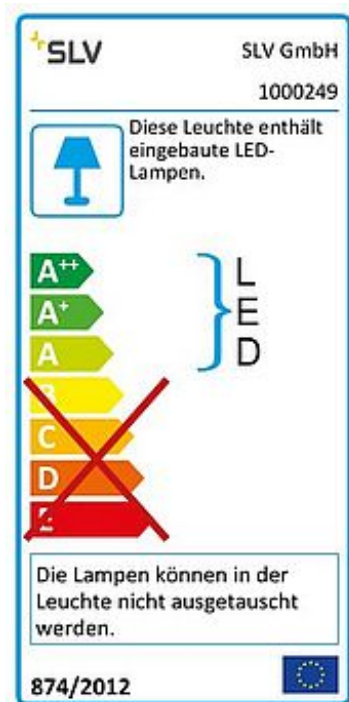

Article number	1000249
Feed-in capability	No
Lamp included	No
Installation diameter	7.7 cm
Installation depth	4 cm
Tilt range	30 Degree
Length	9 cm
Width	9 cm
Height	3.5 cm
Net weight	0.257 kg
Gross weight	0.312 kg
Voltage	220-240V ~50/60Hz sec. 350mA
Protection class	II
Beam angle	38 Degree
Average lifespan	40000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	700 lm
Energy efficiency class	A++
Way of mounting	Recessed mounted / Ceiling recessed
Colour	brushed aluminium
Form	square
Light distribution type 1	direct
Light distribution type 2	rotational symmetric
Material	Aluminium

Articles of this series

113911	NEW TRIA 1 SET recessed fitting, single-headed LED, 3000K, square, white, 38°, 9.1W, incl. driver, clip springs
113916	NEW TRIA 1 SET recessed fitting, single-headed LED, 3000K, square, brushed aluminium, 38°, 9.1W, incl. driver, clip springs
1000248	PIREQ 77, square, downlight, matt white, 6W, 38°, 3000K, incl. driver, clip spring

The simplicity and effectiveness of the innovative PIREQ 68 is captivating. It is available in matt black, white, or brushed aluminium, and in round or square form. Equipped with one powerful, warm white premium COB LED, as well as LED driver included in the scope of supply, the set can be used in any lighting situation. Furthermore, it is adjustable by 38°. The electrical connection is made directly to the 230V mains supply. This luminaire contains built-in LED lamps. EEL: A - A++. The lamps in the luminaire cannot be replaced.

Notes
