


PIREQ IP

recessed ceiling light , round, brushed aluminium, 38°, 3000K, incl. driver

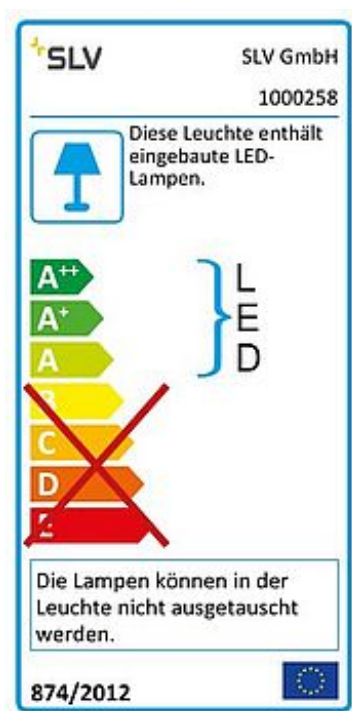

Article number	1000258
Feed-in capability	No
Lamp included	No
Installation diameter	6 cm
Installation depth	10 cm
Height	4.5 cm
Diameter	8 cm
Net weight	0.253 kg
Gross weight	0.31 kg
Voltage	220-240V ~50/60Hz sec. 500mA
Protection class	II
IP-rating	IP 20
Beam angle	38 Degree
Average lifespan	40000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	910 lm
Energy efficiency class	A++
Way of mounting	Recessed mounted / Ceiling recessed
Colour	brushed aluminium
Form	round
Light distribution type 1	direct
Light distribution type 2	rotational symmetric
Material	Aluminium/glass

The innovative PIREQ IP recessed fitting is suitable for ceiling thicknesses of up to 25 mm. Rated IP65 it can be used outdoors or in damp areas. This set is available in matt black, matt white, or brushed aluminium as well as in round or square form. Equipped with a powerful, warm white premium COB LED in a tilting mount, as well as dimmable LED driver included in the scope of supply, the set can be used in any lighting situation. The electrical connection is made directly to the 230V mains supply.

Notes
