


DORENO

round, white, 75°, 3000K

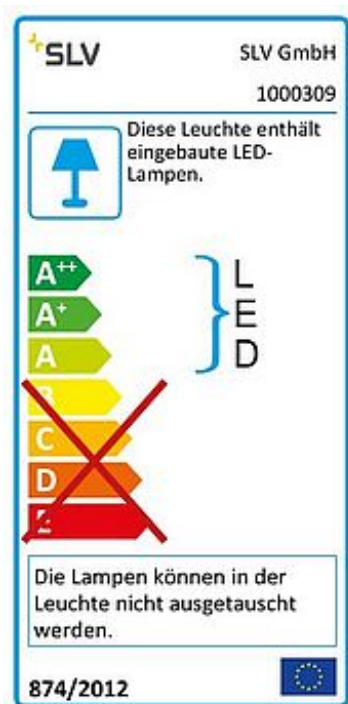

Article number 1000309

Feed-in capability No

Lamp included No

Installation diameter 17.5 cm

Installation depth 16 cm

Height 10.9 cm

Diameter 26 cm

Net weight 0.874 kg

Gross weight 1.241 kg

Voltage 700mA/1000mA/1050mA

Protection class III

IP-rating IP 20

Beam angle 75 Degree

Average lifespan 25000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 2800 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Ceiling recessed / Ceiling recessed with accessories

Colour white

Form round

Light distribution type 1 direct

Light distribution type 2 rotational symmetric

Material	Aluminium
----------	-----------

Type of plug open cable end

The simplicity and effectiveness of the innovative DORENO downlight is captivating. It is available in 3000K and 4000K. Equipped with a powerful, warm white LED, the downlight can be used in any lighting situation. The electrical connection is made using an exclusive LED driver.

Notes
