



GIMBLE OUT

inground fitting, LED, 3000K, stainless steel 316, 36°, IP67

Article number 1000384

Feed-in capability No

Lamp included No

Installation diameter 15 cm

Installation depth 17 cm

Rotation range 350 Degree

Height 13.1 cm

Diameter 18 cm

Net weight 3.037 kg

Gross weight 3.247 kg

Voltage 220-240V ~50/60Hz sec. 600mA

Protection class I

IP-rating IP 67

Beam angle 36 Degree

Average lifespan 35000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 1000 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Inground / Inground with accessories


Colour Brushed stainless steel

Form round

Light distribution type 1 direct

Material Stainless steel 316 / Glass

SLV

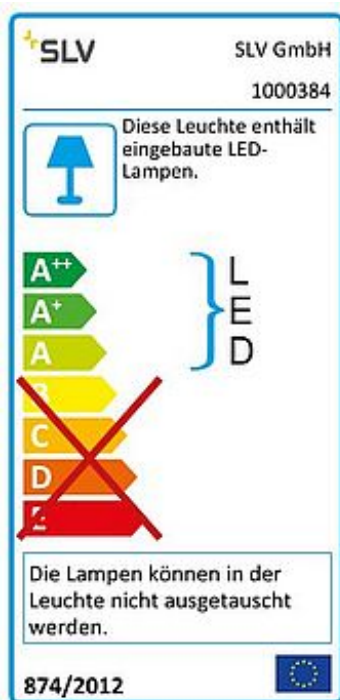

Type of plug open cable end

The GIMBLE OUT 150 LED inground fitting with round bezel and transparent glass cover is equipped with an LED module. The head of the luminaire, which also contains the LED module, can be pulled out of the luminaire by 90°. With its IP67 protection class, the luminaire is suitable for outdoor use. The electrical connection is made directly to the 230V mains supply. This luminaire contains built-in LED lamps. EEL: A - A++ . The lamps in the luminaire cannot be replaced.

Notes
