




SLV

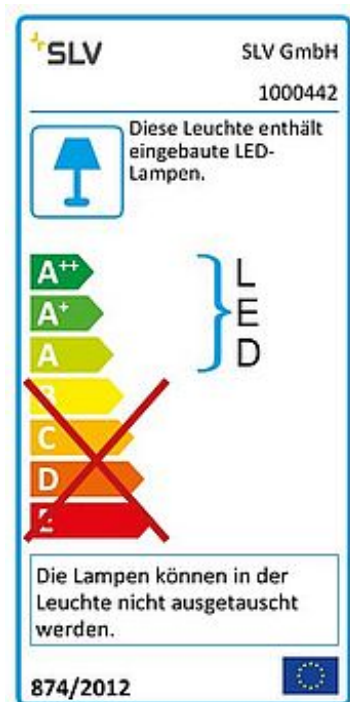

BATO 45 CW

LED Indoor surface-mounted ceiling light, brass, LED, 2500K

Article number	1000442
Product family	BATO
Feed-in capability	No
Lamp included	No
Height	19 cm
Diameter	45 cm
Net weight	1.8 kg
Gross weight	1.926 kg
Voltage	220-240V ~50/60Hz sec. 700mA
Protection class	I
Beam angle	100 Degree
Average lifespan	30000 Hours
Colour temperature	2500 Kelvin
Colour rendering index	80
Luminous flux	1900 lm
Energy efficiency class	A++
Way of mounting	Surface mounted / Ceiling mounted / Wall mounted
Colour	brushed brass
Form	round
Light distribution type 1	direct
Light distribution type 2	rotational symmetric
Material	Aluminium/steel/PMMA

Articles of this series

1000435	BATO 45 PD, LED Indoor pendant light, black, LED, 2700K
1000436	BATO 35 PD, LED Indoor pendant light, black, LED, 2700K
1000437	BATO 45 CW, LED Indoor surface-mounted ceiling light, black, LED, 2700K
1000440	BATO 45 PD, LED Indoor pendant light, brass, LED, 2500K
1000441	BATO 35 PD, LED Indoor pendant light, brass, LED, 2500K
1000743	BATO 35 CW, LED Indoor surface-mounted wall and ceiling light, black, LED, 2700K
1000745	BATO 35 CW, LED Indoor surface-mounted wall and ceiling light, brass, LED, 2500K
1000433	BATO 45 PD, Indoor pendant light, black, E27, max. 60W
1000434	BATO 35 PD, Indoor pendant light, black, E27, max. 60W
1000438	BATO 45 PD, Indoor pendant light, brass, E27, max. 60W
1000439	BATO 35 PD, Indoor pendant light, brass, E27, max. 60W
1000443	BATO 45 CW, Indoor surface-mounted ceiling light, black, E27, max. 60W
1000445	BATO 45 CW, Indoor surface-mounted ceiling light, brass, E27, max. 60W
1000746	BATO 35 CW, Indoor surface-mounted wall and ceiling light, black, E27, max. 60W
1000748	BATO 35 CW, Indoor surface-mounted wall and ceiling light, brass, E27, max. 60W
1001350	BATO 45 PD, LED Indoor pendant light, black/brass, LED, 2700K
1001351	BATO 35 PD, LED Indoor pendant light, black/brass, LED, 2700K

The ceiling lights in the BATO family are available in two sizes and three colour variants. You can also choose between built-in LED light sources and an E27 socket. The range is completed with associated wall lights and pendants. The BATO is supplied ready for direct connection to a 230V mains power supply. This luminaire has integrated bulbs in energy classes: A - A++

Notes

