


PANEL 60 round

LED Indoor surface-mounted ceiling light, silver-grey, 4000K

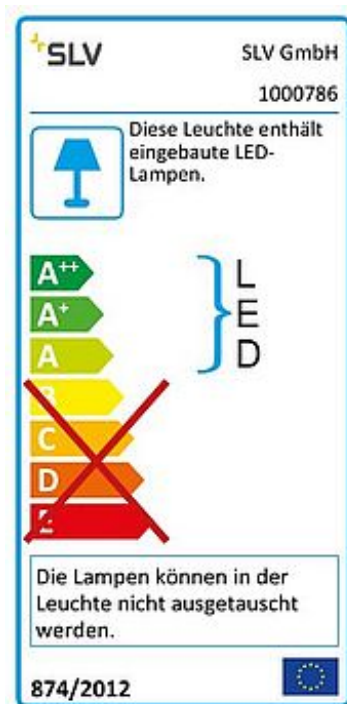

| | |
|---------------------------|-----------------------------------|
| Article number | 1000786 |
| Feed-in capability | No |
| Lamp included | No |
| Installation diameter | 20 cm |
| Installation depth | 7 cm |
| Height | 5.5 cm |
| Diameter | 60 cm |
| Net weight | 5 kg |
| Gross weight | 5.35 kg |
| Voltage | 220-240V ~50/60Hz sec. 1000mA |
| Protection class | I |
| Beam angle | 110 Degree |
| Material | Aluminium/steel/PMMA |
| Colour | Silver-grey |
| Average lifespan | 30000 Hours |
| Colour temperature | 4000 Kelvin |
| Colour rendering index | 80 |
| Luminous flux | 3350 lm |
| Energy efficiency class | A++ |
| Way of mounting | Surface mounted / Ceiling mounted |
| Form | round |
| Light distribution type 1 | direct |
| Light distribution type 2 | rotational symmetric |

The LED PANEL 60 comes with several different light and housing colours, and provides a modern and space-saving solution for an efficient type of basic lighting. The high degree of luminous flux provides a pleasant, homogeneous and glare-free lighting feeling. The electrical connection is made directly to the 230V mains voltage supply. This luminaire contains built-in LED lamps. EEI: A - A++. The lamps in the luminaire cannot be replaced.

Notes
