
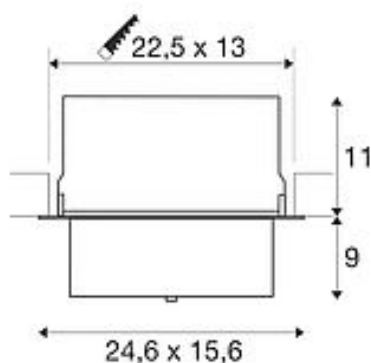


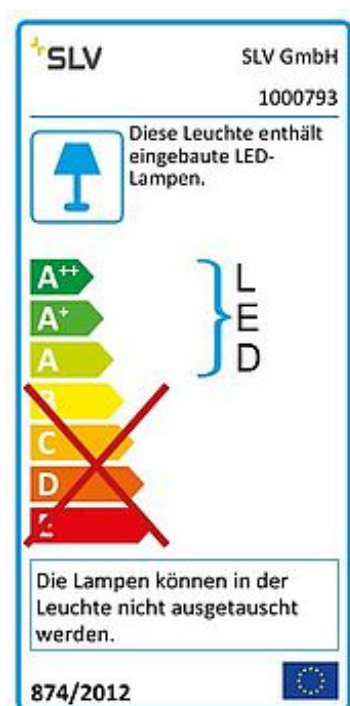

Article number 1000793

Feed-in capability No

Lamp included No

Installation length 22.5 cm

Installation width 13 cm

Installation depth 11.3 cm

Tilt range 60 Degree

Length 24.6 cm

Width 15.6 cm

Height 11.3 cm

Net weight 2.216 kg

Gross weight 2.474 kg

Voltage 700mA

Protection class III

Average lifespan 35000 Hours

Colour temperature 4000 Kelvin

Colour rendering index 90

Luminous flux 2750 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Ceiling recessed


Colour white

Form square

Light distribution type 1 direct

Light distribution type 2 axis symmetric

Material Aluminium/glass

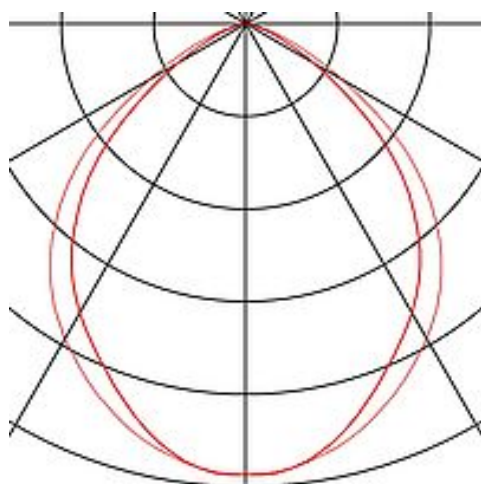

The ALAMEA recessed ceiling light for commercial applications and applications needing clear light properties. Available with a black or white housing, the ALAMEA is equipped with a powerful 29.4 Watt LED. The LED insert, which is available in two light colours, is telescopic and adjustable, and can therefore be flexibly directed. A suitable LED constant current driver is required to operate the recessed fitting. This luminaire has a built-in LED module with energy class: A - A++

Notes
