


Q-LINE PD

LED indoor pendant, 2m, BAP, white, 3000K

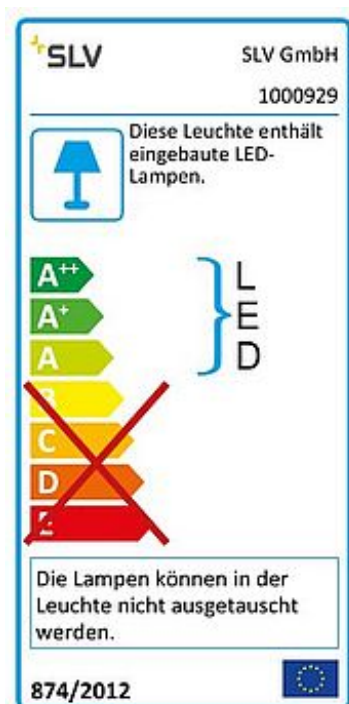

Article number	1000929
Feed-in capability	No
Lamp included	No
Length	200 cm
Width	6 cm
Height	6 cm
Pendant length	150 cm
Net weight	4.454 kg
Gross weight	5.296 kg
Voltage	220-240V ~50/60Hz sec. 900mA
Protection class	I
Beam angle	30 Degree
Material	TBD
Colour	white
Average lifespan	25000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	90
Luminous flux	4200 lm
Energy efficiency class	A++
Way of mounting	Surface mounted / Ceiling mounted
Form	square
Light distribution type 1	direct
Light distribution type 2	axis symmetric

The Q-LINE ceiling light is optionally available with a white, black, or silver-grey luminaire housing. It is also available with a pure white or warm white LED, and different dimensions. Its high luminance and UGR value of less than 10 make the Q-Line luminaire suitable for workstations. Thanks to the TRIAC dimmable LED driver, the luminaire can be directly connected to the 230 Volt mains voltage supply.

Notes
