

L-LINE 60 LED

wall and ceiling light, IP44, 3000K, 820lm, silver-grey

Article number 1001300

Feed-in capability No

Lamp included No

Width 61.8 cm

Height 7 cm

Depth 7 cm

Net weight 1.157 kg

Gross weight 1.382 kg

Voltage 220-240V ~50/60Hz sec. 350mA

Protection class I

IP-rating IP 44

Beam angle 120 Degree

Average lifespan 30000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 820 lm

Energy efficiency class A++

Way of mounting Surface mounted / Wall mounted

Colour silver anodised

Form square


Light distribution type 1 direct

Light distribution type 2 symmetric


Light distribution type 3 indirect

Light distribution type 4 symmetric

Material Aluminium/plastic PC

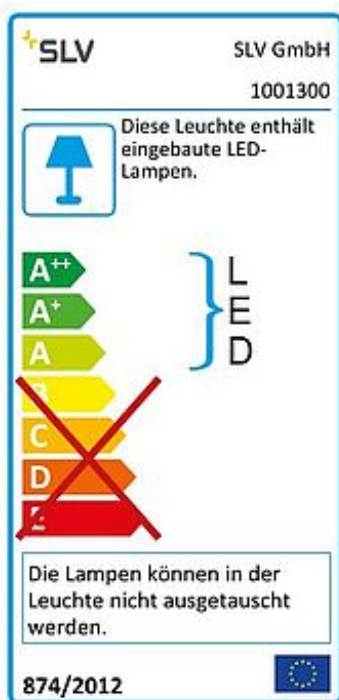

The L-LINE 120 wall and ceiling light, which is equipped with a warm-white LED module, is the ultimate LED solution for primary room illumination thanks to the LED output. The sleek and elegant L-LINE 120 is available in white, silver-grey and grey. Thanks to the integrated LED driver, the luminaire can be connected directly to a 230 Volt mains power supply.

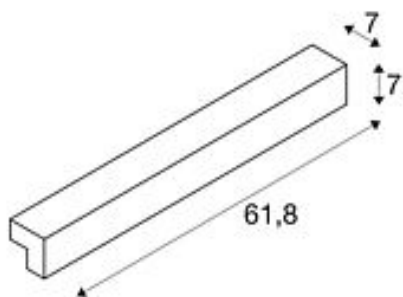

Notes
