




## AROSA

1,25m, TRIAC PD, LED indoor pendant, aluminium, 3000K

Article number 1001942

Feed-in capability No

Lamp included No

Length 125.3 cm

Width 2.7 cm

Height 4.2 cm

Pendant length 200 cm

Net weight 2.2 kg

Gross weight 2.354 kg

Voltage 220-240V ~50/60Hz sec. 500mA

Protection class I

Beam angle 110 Degree

Material Aluminium/steel/PMMA

Colour anodised aluminium

Average lifespan 40000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 1700 lm


Energy efficiency class A++

Form square

Way of mounting Surface mounted / Ceiling mounted

Light distribution type 1 direct - indirect

Light distribution type 2 axis symmetric

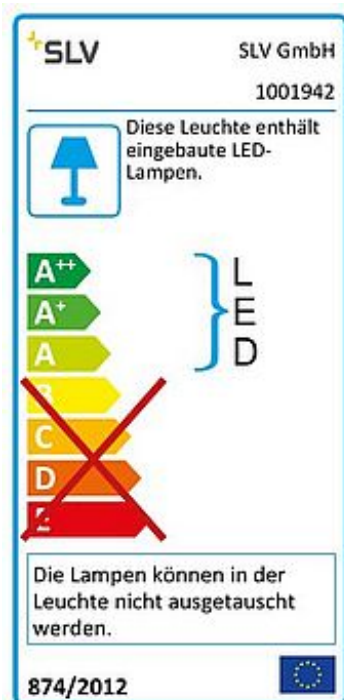

The AROSA pendant, available in two lengths, is equipped with white, black or anodised aluminium housing as desired. A PMMA diffuser, which is used on the upper and lower light outlet, provides glare-free lighting characteristics. The integrated warm-white LEDs provide a high degree of light output. Thanks to the TRIAC dimmable LED driver, the luminaire can be directly connected to the 230 Volt mains voltage supply.

Notes

---

---

---