




AROSA

2m, TRIAC PD, LED indoor pendant, aluminium, 3000K

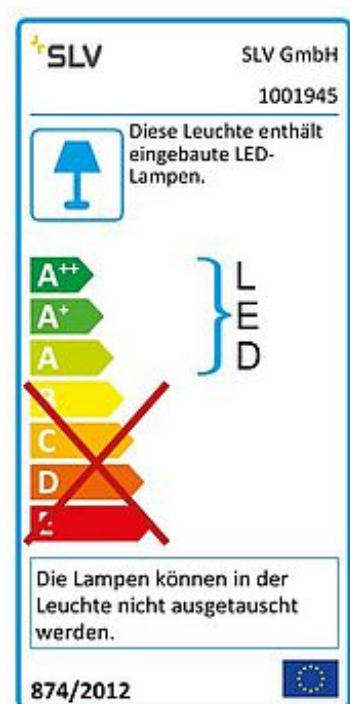

Article number	1001945
Feed-in capability	No
Lamp included	No
Length	200.3 cm
Width	2.7 cm
Height	4.2 cm
Pendant length	200 cm
Net weight	3 kg
Gross weight	3.21 kg
Voltage	220-240V ~50/60Hz sec. 600mA
Protection class	I
Beam angle	110 Degree
Material	Aluminium/steel/PMMA
Colour	anodised aluminium
Average lifespan	40000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	3600 lm
Energy efficiency class	A++
Form	square
Way of mounting	Surface mounted / Ceiling mounted
Light distribution type 1	direct - indirect
Light distribution type 2	axis symmetric

The AROSA pendant, available in two lengths, is equipped with white, black or anodised aluminium housing as desired. A PMMA diffuser, which is used on the upper and lower light outlet, provides glare-free lighting characteristics. The integrated warm-white LEDs provide a high degree of light output. Thanks to the TRIAC dimmable LED driver, the luminaire can be directly connected to the 230 Volt mains voltage supply.

Notes
