


SLV RILO DL

LED indoor recessed ceiling light, white/chrome, 3000/4000K, 5.5W

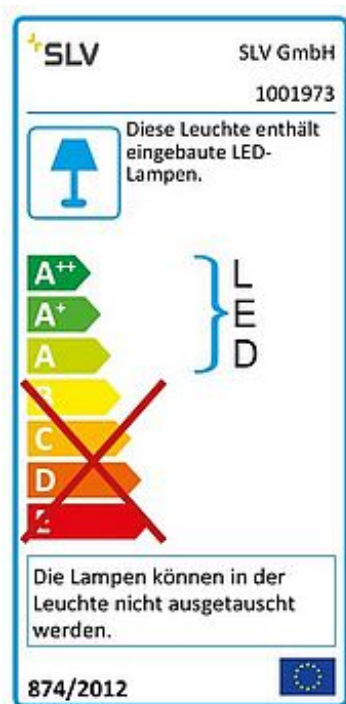

| | |
|---------------------------|-------------------------------------|
| Article number | 1001973 |
| Feed-in capability | No |
| Lamp included | No |
| Installation diameter | 9 cm |
| Installation depth | 8 cm |
| Height | 7 cm |
| Diameter | 11 cm |
| Net weight | 0.176 kg |
| Gross weight | 0.289 kg |
| Voltage | 220-240V ~50/60Hz sec. 75mA |
| Protection class | I |
| Beam angle | 60 Degree |
| Material | Aluminium/plastic PC |
| Colour | white/chrome |
| Average lifespan | 25000 Hours |
| Colour temperature | 3000 Kelvin |
| Colour rendering index | 90 |
| Luminous flux | 400 lm |
| Energy efficiency class | A++ |
| Form | round |
| Way of mounting | Recessed mounted / Ceiling recessed |
| Light distribution type 1 | direct |
| Light distribution type 2 | rotational symmetric |

RILO series LED recessed ceiling lights impress with their innovative technology. The light colour can be adjusted via a switch during installation, and the UGR value is less than 19 and the Cri is greater than 90! The luminaire, which is available with a white housing, is connected directly to the 230V mains voltage supply.

Notes
