


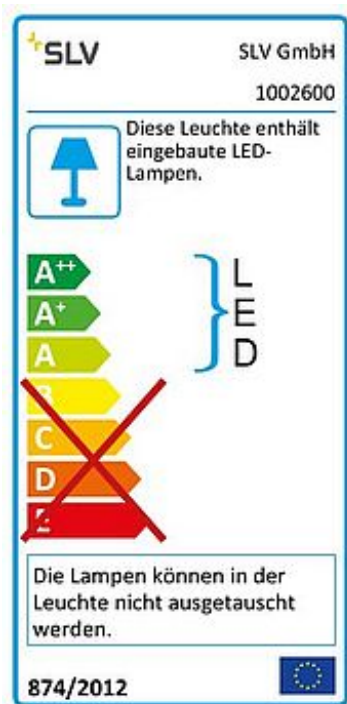

AIXLIGHT® PRO 50 LED module 4000K white/black 50°

Article number	1002600
Product family	AIXLIGHT®
Feed-in capability	No
Lamp included	No
Height	9.2 cm
Diameter	7.9 cm
Net weight	0.21 kg
Gross weight	0.224 kg
Voltage	350mA
Protection class	III
Beam angle	50 Degree
Material	Aluminium/glass
Average lifespan	30000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	80
Luminous flux	1185 lm
Energy efficiency class	A++
Type of plug	open cable end
Form	round

Articles of this series

115011	QPAR111 MODULE, for AIXLIGHT PRO installation frame, QPAR111, white, max. 75W
115014	QPAR111 MODULE, for AIXLIGHT PRO installation frame, QPAR111, silver-grey/black, max. 75W
115414	GU10 MODULE for AIXLIGHT PRO 50 installation housing, silver-grey / black, max. 50W
154012	AIXLIGHT MOD, recessed fitting, single-headed, QR111, silver-grey, max. 50W, multi-directional
154022	AIXLIGHT MOD, recessed fitting, double-headed, QR111, silver-grey, max. 50W, multi-directional
154032	AIXLIGHT MOD, recessed fitting, triple-headed, QR111, silver-grey, max. 50W, multi-directional
154042	AIXLIGHT MOD, recessed fitting, four-headed, QR111, silver-grey, max. 50W, multi-directional
154052	AIXLIGHT MOD, recessed fitting, single-headed, QPAR111, silver-grey, max. 75W, multi-directional
154062	AIXLIGHT MOD, recessed fitting, double-headed, QPAR111, silver-grey, max. 75W, multi-directional
154072	AIXLIGHT MOD, recessed fitting, triple-headed, QPAR111, silver-grey, max. 75W, multi-directional
154082	AIXLIGHT MOD, recessed fitting, four-headed, QPAR111, silver-grey, max. 75W, multi-directional
154112	AIXLIGHT MOD, recessed fitting, single-headed, QR-C51, silver-grey, max. 50W, multi-directional
154122	AIXLIGHT MOD, recessed fitting, double-headed, QR-C51, silver-grey, max. 50W, multi-directional
154142	AIXLIGHT MOD, recessed fitting, four-headed, QR-C51, silver-grey, max. 50W, multi-directional
154202	AIXLIGHT LONG, pendant, four-headed, QR-LP111, rectangular, silver-grey, max. 200W
154212	AIXLIGHT SQUARE, pendant, four-headed, QR-LP111, square, silver-grey, max. 200W
154232	AIXLIGHT SQUARE, pendant, four-headed, QR51, silver-grey, max. 200W
154242	AIXLIGHT LONG, pendant, four-headed, QPAR51, rectangular, silver-grey, max. 200W

154252	AIXLIGHT SQUARE, pendant, four-headed, QPAR51, square, silver-grey, max. 4x50W
154262	AIXLIGHT KARDAFRAME, wall light, QR-LP111, silver-grey, max. 50W
154292	AIXLIGHT KARDAFRAME, wall light, QPAR51, silver-grey, max. 50W
154332	AIXLIGHT OFFICE, pendant, T26, silver-grey, max. 75W, energy saving lamp, 222W
154352	AIXLIGHT, pendant, double-headed, QPAR111, silver-grey, max. 150W
154362	AIXLIGHT LONG, pendant, four-headed, QPAR111, rectangular, silver-grey, max. 300W
154372	AIXLIGHT SQUARE, pendant, four-headed, QPAR111, square, silver-grey, max. 300W
154382	AIXLIGHT SHOP 1, pendant, QT-DE12, silver-grey, max. 200W, max. 550W
154512	KARDATRACK, pendant for 3-phase 240V track, four-headed, QR-LP111, silver-grey, max. 200W, incl. 3-phase adapter
154562	AIXLIGHT MOD, recessed fitting, double-headed, QPAR51, silver-grey, max. 100W, multi-directional
154572	AIXLIGHT MOD, recessed fitting, triple-headed, QPAR51, silver-grey, max. 150W, multi-directional
154602	AIXLIGHT 1, recessed fitting, single-headed, QPAR111, chrome/black, max. 75W
154612	AIXLIGHT 2, recessed fitting, double-headed, QPAR111, chrome/black, max. 150W
154622	AIXLIGHT 1, recessed fitting, single-headed, QR-LP111, chrome/black, max. 50W
154632	AIXLIGHT 2, recessed fitting, double-headed, QR-LP111, chrome/black, max. 100W
154774	1ER QR-LP111 MODULE, for AIXLIGHT PENDANT SYSTEM, single-headed, silver-grey, multi-directional, 60°, max. 100W
154784	2ER QR-LP111 MODULE, for AIXLIGHT PENDANT SYSTEM, double-headed, silver-grey, multi-directional, 60°, max. 200W
154794	HIT MODULE, for AIXLIGHT PENDANT SYSTEM, HIT-CE, silver-grey, multi-directional, 60°, max. 70W

154804	PL MODULE, for AIXLIGHT PENDANT SYSTEM, TC-LEL, silver-grey, energy saving lamp, max. 72W
154814	T5 ELEMENT, for AIXLIGHT PENDANT SYSTEM, T16, silver-grey, max. 54W
154824	HIT MODULE, for AIXLIGHT PENDANT SYSTEM, HIT-CE, silver-grey, multi-directional, 60°, max. 35W
154642	AIXLIGHT 3, recessed fitting, triple-headed, QPAR111, chrome/black, 3x75W max.
154652	AIXLIGHT 3, recessed fitting, triple-headed, QP111, chrome/black, 3x50W max.
154662	AIXLIGHT 1, recessed fitting, single-headed, LED, 3000K, chrome/black, 30°, 24,5W, incl. driver
154672	AIXLIGHT 2, recessed fitting, single-headed, LED, 3000K, chrome/black, 30°, 2x24,5W, incl. driver
1002598	AIXLIGHT® PRO 50 LED module 3000K white/black 50°,
1002599	AIXLIGHT® PRO 50 LED module 3000K grey/black 50°,
1002601	AIXLIGHT® PRO 50 LED module 4000K grey/black 50°,
115104	INSTALLATION FRAME 1 FRAME for AIXLIGHT PRO, square, silver-grey/black, L/W/H 17.5/17.5/19 cm
115114	INSTALLATION FRAME 2 FRAME for AIXLIGHT PRO, rectangular, silver-grey/black, L/W/H 31.5/17.5/19 cm
115151	INSTALLATION FRAME 1 FRAMELESS, for AIXLIGHT PRO, square, black, L/W/H 15.5/15.5/18.5 cm, incl. installation frame
115152	INSTALLATION FRAME 2 FRAMELESS, for AIXLIGHT PRO, rectangular, black, L/W/H 31.5/15.5/18.5 cm, incl. installation frame
115304	INSTALLATION FRAME 1 FRAME for AIXLIGHT PRO, square, silver-grey/black, L/W/H 10/10/10 cm
115314	INSTALLATION FRAME 2 FRAME for AIXLIGHT PRO, rectangular, silver-grey/black, L/W/H 17.3/10/10 cm
115351	INSTALLATION FRAME 1 FRAMELESS, for AIXLIGHT PRO, square, black, L/W/H 10.2/10.2/10.5 cm, incl. installation frame
115352	INSTALLATION FRAME 2 FRAMELESS, for AIXLIGHT PRO, rectangular, black, L/W/H 18.8/10.2/10.5 cm, incl. installation frame

115624	INSTALLATION FRAME 1 FRAMELESS for AIXLIGHT PRO, round, black, Ø/H 15.5/12 cm, incl. installation frame
115634	INSTALLATION FRAME 2 FRAMELESS, for AIXLIGHT PRO, oval, black, L/W/H 32.5/15.5/12 cm, incl. installation frame
154302	WALL BRACKET, for AIXLIGHT LONG and SQUARE QR-C51, silver-grey, short, 2 pieces
154312	WALL AND CEILING BRACKET, for AIXLIGHT LONG and SQUARE QR-C51/ QPAR51, silver-grey, long, 2 pieces
154704	AIXLIGHT PENDANT SYSTEM BASISRAHMEN, silver-grey, L/W/H 110/22.5/4.5 cm
154714	AIXLIGHT PENDANT SYSTEM BASISRAHMEN, silver-grey, L/W/H 160/22.5/4.5 cm
154724	CONNECTION AND FEED-IN BOX, for AIXLIGHT PENDANT SYSTEM, silver-grey
154734	CANOPY, with feed-in cable for AIXLIGHT PENDANT SYSTEM, silver-grey
154744	CONNECTION SCREW SET, for AIXLIGHT PENDANT SYSTEM, chrome, 2 pieces
154754	FRAME CONNECTOR, for AIXLIGHT PENDANT SYSTEM, silver-grey

The high-voltage LED MODULE for use in the relevant AIXLIGHT® PRO50 installation housings, is available in several housing and light colours. The module insert is supplied ready for direct connection to 230V mains supply.

Notes
