




TENSEO NOBLO

cable luminaire for low voltage cable system 2700K white

Article number	1002695
Product family	NOBLO
Feed-in capability	No
Lamp included	No
Tilt range	90 Degree
Rotation range	340 Degree
Length	8.8 cm
Width	18.6 cm
Height	11.1 cm
Diameter	5.5 cm
Net weight	0.345 kg
Gross weight	0.5 kg
Voltage	12V ~50Hz
Protection class	III
Beam angle	36 Degree
Average lifespan	25000 Hours
Colour temperature	2700 Kelvin
Colour rendering index	80
Luminous flux	450 lm
Material	Aluminium/steel/PMMA
Form	round

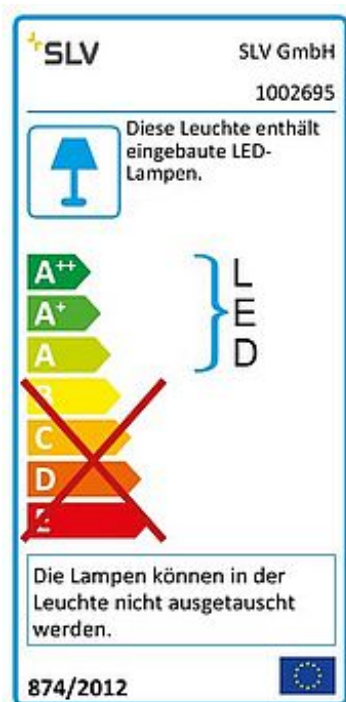

Articles of this series

1001862 NOBLO SPOT, black, 2700K, 36°, incl. 1-circuit adapter

1001863 NOBLO SPOT, white, 2700K, 36°, incl. 1-circuit adapter

1001864 NOBLO SPOT, silver-grey, 2700K, 36°, incl. 1-circuit adapter

1001865 NOBLO SPOT, black, 2700K, 36°, incl. 3-circuit adapter

1001866 NOBLO SPOT, white, 2700K, 36°, incl. 3-circuit adapter

1001867 NOBLO SPOT, silver-grey, 2700K, 36°, incl. 3-circuit adapter

1002694 TENSEO NOBLO, cable luminaire for low voltage cable system 2700K black

1002696 TENSEO NOBLO, cable luminaire for low voltage cable system 2700K chrome

The NOBLO rotating and swivelling LED spotlight for the TENSEO low-voltage cable system. The luminaire impresses with its slim design and is therefore ideal for modern lighting concepts. The luminaire is made from aluminium and equipped with a Premium LED module.

Notes
