



TENSEO NOBLO

cable luminaire for low voltage cable system 2700K chrome

Article number 1002696

Product family NOBLO

Feed-in capability No

Lamp included No

Tilt range 90 Degree

Rotation range 340 Degree

Length 8.8 cm

Width 18.6 cm

Height 11.1 cm

Diameter 5.5 cm

Net weight 0.35 kg

Gross weight 0.374 kg

Voltage 12V ~50Hz

Protection class III

Beam angle 36 Degree

Average lifespan 25000 Hours


Colour temperature 2700 Kelvin

Colour rendering index 80

Luminous flux 450 lm

Material Aluminium/steel/PMMA

Form round

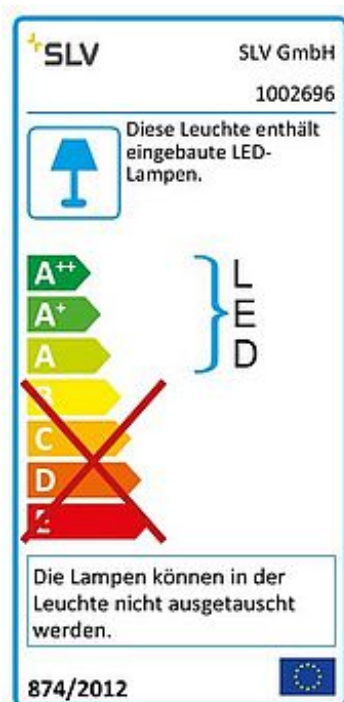

Articles of this series

1001862 NOBLO SPOT, black, 2700K, 36°, incl. 1-circuit adapter

1001863 NOBLO SPOT, white, 2700K, 36°, incl. 1-circuit adapter

1001864 NOBLO SPOT, silver-grey, 2700K, 36°, incl. 1-circuit adapter

1001865 NOBLO SPOT, black, 2700K, 36°, incl. 3-circuit adapter

1001866 NOBLO SPOT, white, 2700K, 36°, incl. 3-circuit adapter

1001867 NOBLO SPOT, silver-grey, 2700K, 36°, incl. 3-circuit adapter

1002694 TENSEO NOBLO, cable luminaire for low voltage cable system 2700K black

1002695 TENSEO NOBLO, cable luminaire for low voltage cable system 2700K white

The NOBLO rotating and swivelling LED spotlight for the TENSEO low-voltage cable system. The luminaire impresses with its slim design and is therefore ideal for modern lighting concepts. The luminaire is made from aluminium and equipped with a Premium LED module.

Notes
