




L-LINE OUT 60 FL


Outdoor LED free-standing light anthracite CCT switch 3000/4000K

Whether in gardens, along the paths and driveways of residential buildings, hotels or restaurants - with its variety of lights, the L-LINE OUT family lights the way outdoors. Despite their individual differences, the individual members share a design vocabulary in L-shape, which stands out with its clear lines. And when it comes to lighting technology, there are no compromises: the choice of light colour (3000/4000K), which can be selected during the easy installation process, and IP protection class 65 are just some of the benefits of the L-LINE OUT.



TECHNICAL DATA

Item no.:	1003535
Number of different light outlets	1
Primary nominal voltage	220-240V ~50/60Hz mA/V
Secondary power / secondary voltage	500 mA/V
Length	50.0 cm
Width	10.0 cm
Height	10.0 cm
Net weight	1.723 kg
Gross weight	2.157 kg
IP Code	IP 65
Safety class	I
Impact resistance class	IK02
Impact resistance	0,20000000000000001 Joule
Assembly	Surface
Assembly details	Ground
Wattage	11.5 W
Lumen	780 / 800 lm
Colour temperature	3000/4000 Kelvin
Color	anthracite
CRI	>80
Binning	6
LXXBXX data	70/50

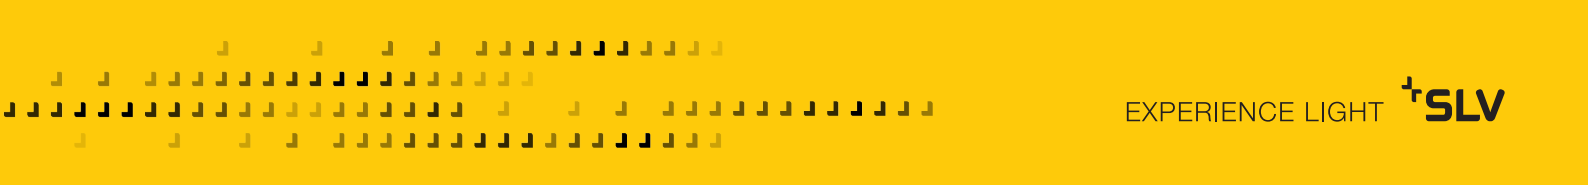

Service life	30000 h
Minimum ambient temperature	-20 °C
Maximum ambient temperature	45 °C
BIG WHITE Page	595

Accessories

228730	CONNECTION BOX , 3-pin, IP68
--------	------------------------------

Notes
