


MR16 SP downlight

round, chrome matt, MR16, max. 50W



Article number	112098
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	G5,3
Number of light sources	1
Lamp included	No
Installation diameter	7.6 cm
Installation depth	9.5 cm
Tilt range	30 Degree
Diameter	8.2 cm
Net weight	0.108 kg
Gross weight	0.135 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	chrome
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

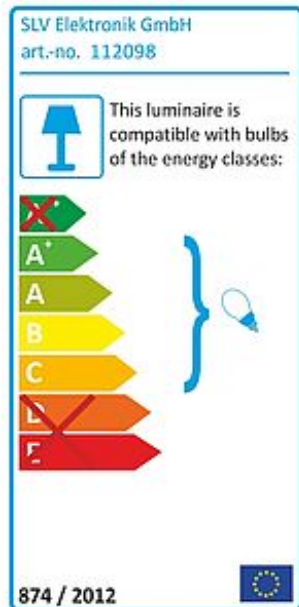

The low voltage MR11 SP downlight from aluminum is available in the white, silvergrey, black, chrome and satin chrome finish. The recessed ring is rotatable and designed for one low-voltage halogen lamp with MR16 Socket. To operate the downlight a suitable transformer providing 12V alternating voltage is needed. This luminaire is compatible with bulbs of the energy classes: C - A+