


MR16 SP downlight

round, silvergrey, MR16, max. 50W

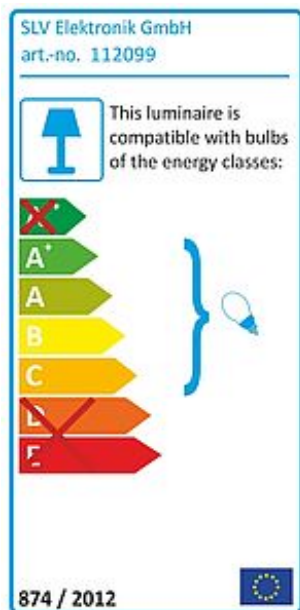

Article number	112099
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	G5,3
Number of light sources	1
Lamp included	No
Installation diameter	7.6 cm
Installation depth	9.5 cm
Tilt range	30 Degree
Diameter	8.2 cm
Net weight	0.113 kg
Gross weight	0.13 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	silvergrey
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

The low voltage MR11 SP downlight from aluminum is available in the white, silvergrey, black, chrome and satin chrome finish. The recessed ring is rotatable and designed for one low-voltage halogen lamp with MR16 Socket. To operate the downlight a suitable transformer providing 12V alternating voltage is needed. This luminaire is compatible with bulbs of the energy classes: C - A+