


GIMBLE round MR16 downlight

round, silvergrey, max. 50W, adjustable

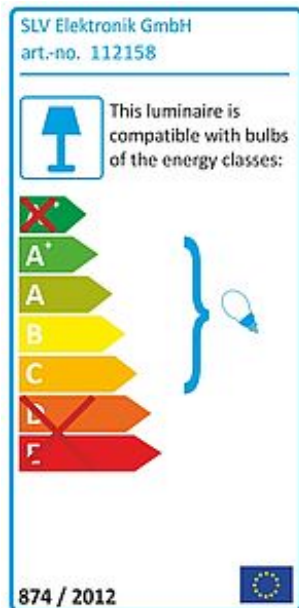

| | |
|------------------------------|---|
| Article number | 112158 |
| Catalogue | BIG WHITE 2015, Page 406 |
| Type of lamp | Conventional lamp |
| Lamp | MR16 12V max. 50W |
| Lampholder / Socket | G5,3 |
| Number of light sources | 1 |
| Lamp included | No |
| Installation diameter | 9.5 cm |
| Installation depth | 12 cm |
| Tilt range | 90 Degree |
| Rotation range | 350 Degree |
| Diameter | 11.5 cm |
| Net weight | 0.44 kg |
| Gross weight | 0.486 kg |
| Voltage | 12 Volt |
| Max. wattage | 50 Watt |
| Protection class | III |
| Material | aluminium |
| Colour | silvergrey |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | Not suitable for the use of cool-beam lamps |
| Remark 2 | Energy labels in your language are available in the Service Area sub point Download |
| Suitable for lamps from EEC | C |
| Suitable for lamps up to EEC | A+ |
| Light distribution type 1 | direct |
| Light distribution type 3 | rotationally symmetric |

The GIMBLE ROUND low-voltage recessed ring is made from aluminium and available in white, silvergrey, chrome and matt chrome. The recessed ring is telescopic, tiltable by 90° and designed for halogen lamps with MR16 low-voltage socket. To operate the downlight a suitable transformer providing 12V alternating current is required. This luminaire is compatible with bulbs of the energy classes: C - A+