


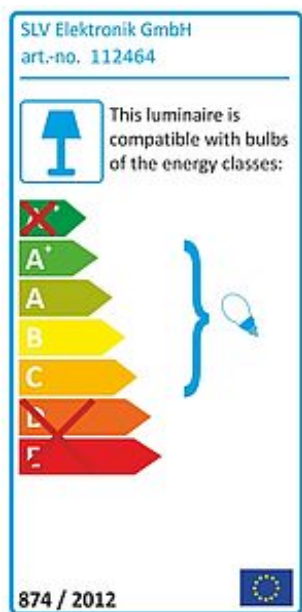

INDI REC 2S downlight

rectangular, silvergrey/black, MR16, adjustable

Article number	112464
Catalogue	BIG WHITE 2015, Page 432
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 35W
Lampholder / Socket	GU5,3
Number of light sources	2
Lamp included	No
Installation length	17.5 cm
Installation width	7 cm
Installation depth	14 cm
Tilt range	70 Degree
Length	18 cm
Width	9 cm
Height	13.5 cm
Net weight	0.547 kg
Gross weight	0.138 kg
Voltage	12 Volt
Max. wattage	70 Watt
Protection class	III
Material	steel
Colour	silvergrey / black
Way of mounting	recessed ceiling mounting
Remark 1	Only suitable for ceilings with a thickness between 5 - 20 mm
Remark 2	Not suitable for the use of cool-beam lamps
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

Light distribution rotationally symmetric
type 3

The low-voltage downlight INDI REC 2S is adjustable and designed for use of low-voltage halogen lamps. The silvegrey steel housing is held in black colour on the inside. To operate the downlight a suitable transformer providing 12V alternating current is required. This luminaire is compatible with bulbs of the energy classes: C - A+