


ROW 1 MR16 downlight

square, silvergrey, GU5,3, max. 50W, adjustable



| | |
|------------------------------|---|
| Article number | 112531 |
| Type of lamp | Conventional lamp |
| Lamp | MR16 12V max. 50W |
| Lampholder / Socket | G5,3 |
| Number of light sources | 1 |
| Lamp included | No |
| Installation diameter | 9.7 cm |
| Installation depth | 9.5 cm |
| Tilt range | 45 Degree |
| Rotation range | 350 Degree |
| Length | 11 cm |
| Width | 11 cm |
| Net weight | 0.203 kg |
| Gross weight | 0.64 kg |
| Voltage | 12 Volt |
| Max. wattage | 50 Watt |
| Protection class | III |
| Material | aluminium |
| Colour | silvergrey |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | Not suitable for the use of cool-beam lamps |
| Remark 2 | Energy labels in your language are available in the Service Area sub point Download |
| Suitable for lamps from EEC | C |
| Suitable for lamps up to EEC | A+ |
| Light distribution type 1 | direct |
| Light distribution type 3 | rotationally symmetric |

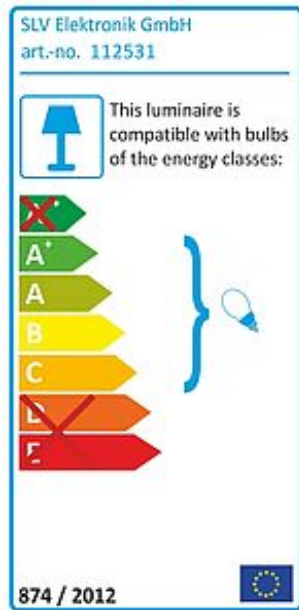

The square shaped low-voltage downlight ROW MR16 is made from aluminum and is available in white or silvergrey colour finish. The generously chosen rotation and tilt range guarantees the individual orientation of light, whether you use halogen or LED retrofit lamps. To operate the ROW MR16 downlight a suitable transformer providing 12V alternating current is required. This luminaire is compatible with bulbs of the energy classes: C - A+