


NEW TRIA III MR16 downlight


rectangular, matt white, max. 3 x50W, incl. retaining

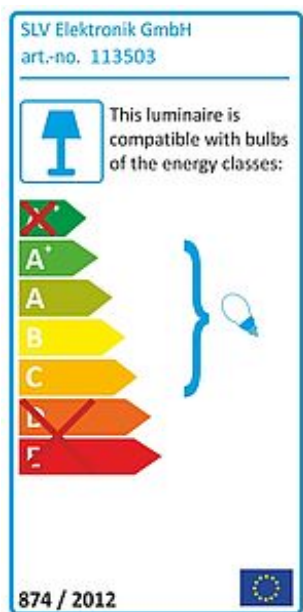

Article number	113503
Catalogue	BIG WHITE 2015, Page 441
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	GX5,3
Number of light sources	3
Lamp included	No
Installation length	23.5 cm
Installation width	7.8 cm
Installation depth	11.5 cm
Tilt range	30 Degree
Rotation range	360 Degree
Length	25 cm
Width	9 cm
Height	12 cm
Net weight	0.462 kg
Gross weight	0.198 kg
Voltage	12 Volt
Max. wattage	150 Watt
Protection class	III
Material	aluminium
Colour	white
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	A suitable 12V transformer is required for operation
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

Light distribution
type 3

rotationally symmetric

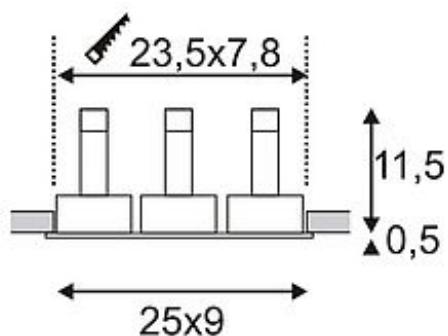

The square low-voltage version of our NEW TRIA downlight series is available in either matt white, matt black or brushed aluminum colour version to be equipped with three illuminants. The generously chosen rotation and tilt range of the spot guarantees the individual orientation of light, whether your light source of interest is halogen or LED retrofit. To operate the NEW TRIA downlights you only need a matching transformer providing 12V alternating current. This luminaire is compatible with bulbs of the energy classes: C - A+