
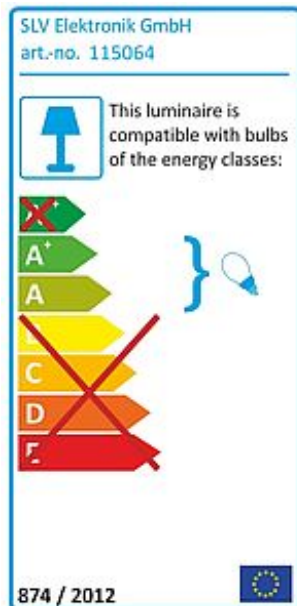


G12 MODULE for AIXLIGHT PRO installation frame

8°, silvergrey/black, max. 70W

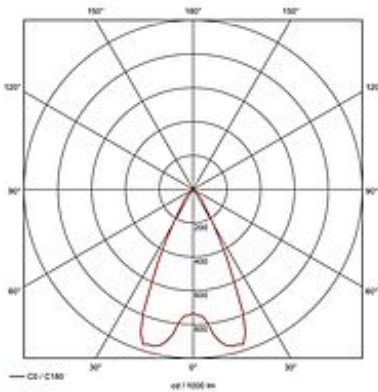

| | |
|------------------------------|---|
| Article number | 115064 |
| Catalogue | BIG WHITE 2015, Page 453 |
| Type of lamp | Conventional lamp |
| Lamp | HQI-T / CDM-T 35W / 70W |
| Lampholder / Socket | G12 |
| Number of light sources | 1 |
| Lamp included | No |
| Height | 15 cm |
| Diameter | 13.5 cm |
| Net weight | 0.465 kg |
| Gross weight | 0.59 kg |
| Max. wattage | 70 Watt |
| Protection class | I |
| Beam angle | 8 Degree |
| Material | aluminium / plastic |
| Colour | silvergrey |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | The luminaire is rotatable and swivelable |
| Remark 2 | Not suitable for flat installation frames |
| Remark 3 | Operate with suitable ballast only |
| Remark 4 | Energy labels in your language are available in the Service Area sub point Download |
| remark5 | Operate with suitable ballast only |
| Suitable for lamps from EEC | A |
| Suitable for lamps up to EEC | A+ |
| Light distribution type 1 | direct |
| Light distribution type 3 | rotationally symmetric |

The G12 module to be mounted into installation housings, is available in silvergrey/black colour finish with various beam angles. A suitable ballast is required for operation. This luminaire is compatible with bulbs of the energy classes: A - A+