
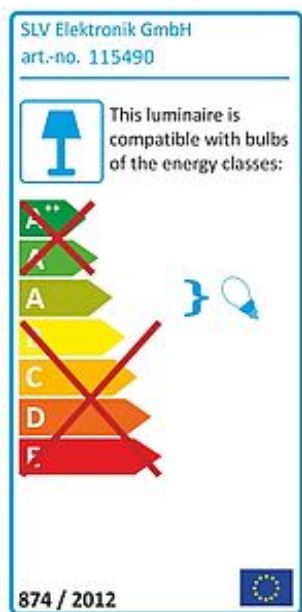


RCL 103 TC-DE FRAMELESS set recessed luminaire


white, Energy Saver, max. 2x 18W

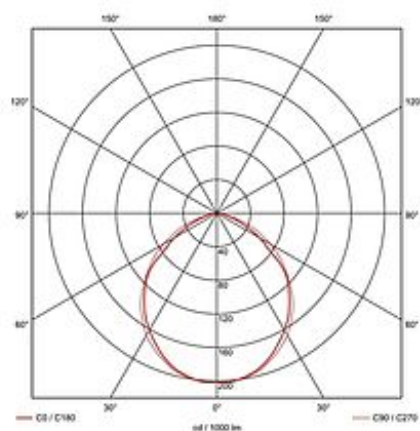

Article number	115490
Type of lamp	Conventional lamp
Lamp	TC-DE compact fluorescent bulb 18W
Lampholder / Socket	G24q-2
Number of light sources	2
Lamp included	No
Installation length	17.7 cm
Installation width	17.7 cm
Installation depth	20 cm
Length	17.7 cm
Width	17.7 cm
Net weight	1.392 kg
Gross weight	0.99 kg
Voltage	230 Volt
Max. wattage	36 Watt
Protection class	I
Material	plastic / aluminium / steel
Colour	white
Way of mounting	recessed ceiling mounting
Remark 1	Electronic ballast incorporated. Measures (L / W / H): 23,5 / 12,5 / 5 cm
Remark 2	Length connection lead: 20 cm
Remark 3	Suitable for hollow core slabs with a thickness from 10 - 60 mm
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	A2
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A
Light distribution type 1	direct

Light distribution
type 3

rotationally symmetric

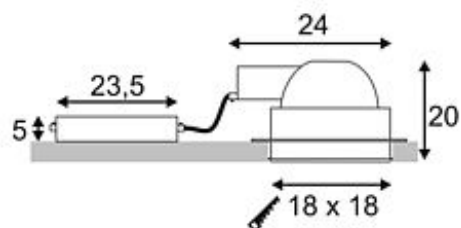

The frameless and energy efficient RCL 103 recessed downlight is made from aluminum and steel and in addition equipped with connection lead and a suitable, electronic ballast for 2x 18W TC-DE lamps. Thus, the set is supplied ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: A - A