
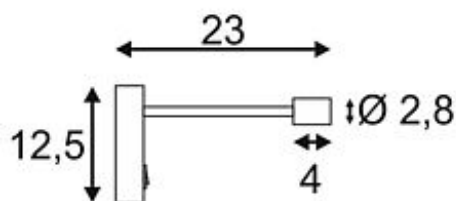


PIPOFLEX wall luminaire

silvergrey, 4W LED, 3000K

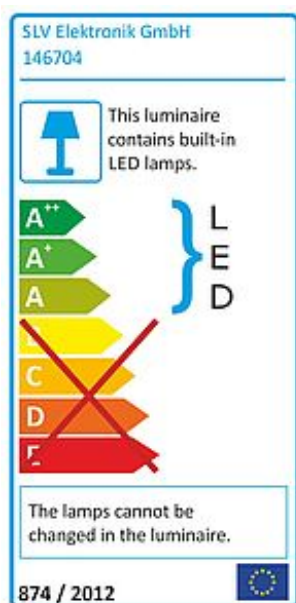

Article number	146704
Catalogue	BIG WHITE 2015, Page 149
Type of lamp	LED lamp
Lamp	Power LED 4W
Number of light sources	1
Lamp included	Yes
Length	16 cm
Diameter	2.8 cm
Net weight	0.306 kg
Gross weight	0.297 kg
Voltage	230 Volt
Max. wattage	4.6 Watt
Protection class	I
Beam angle	35 Degree
Material	aluminium
Colour	silvergrey
Way of mounting	surface wall mounting
Remark 1	Inclusive power switch
Remark 2	Canopy (W / H / D): 12,5 / 6,5 / 3 cm
Remark 3	Length gooseneck: 16 cm
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Average lifespan	35000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	200 lm
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++
Light distribution type 1	direct

The modern high-voltage LED wall light of our PIPOFLEX series convinces by its clear and functional design. The powerful LED in the head of the lamp is connected to the canopy via a rubber sheathed flexible duct. Equipped with a switch located on the canopy, the individually adjustable fitting is suitable for various applications. We also offer a variety of modern colours. Thanks to the incorporated driver, the electrical connection is made directly to 230V mains. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.