



PIPOFLEX wall luminaire

green anadized, 4W LED, 3000K

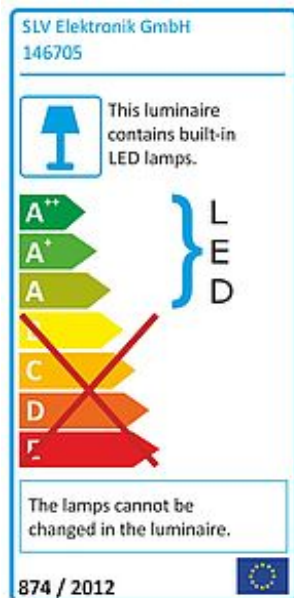

| | |
|------------------------------|---|
| Article number | 146705 |
| Catalogue | BIG WHITE 2015, Page 149 |
| Type of lamp | LED lamp |
| Lamp | Power LED 4W |
| Number of light sources | 1 |
| Lamp included | Yes |
| Length | 16 cm |
| Diameter | 2.8 cm |
| Net weight | 0.27 kg |
| Gross weight | 0.401 kg |
| Voltage | 230 Volt |
| Max. wattage | 4.6 Watt |
| Protection class | I |
| Beam angle | 35 Degree |
| Material | aluminium |
| Colour | green |
| Way of mounting | surface wall mounting |
| Remark 1 | Inclusive power switch |
| Remark 2 | Canopy (W / H / D): 12,5 / 6,5 / 3 cm |
| Remark 3 | Length gooseneck: 16 cm |
| Remark 4 | Energy labels in your language are available in the Service Area sub point Download |
| Average lifespan | 35000 Hours |
| Colour temperature | 3000 Kelvin |
| Colour rendering index | 80 |
| Luminous flux | 200 lm |
| Suitable for lamps from EEC | A |
| Suitable for lamps up to EEC | A++ |
| Light distribution type 1 | direct |

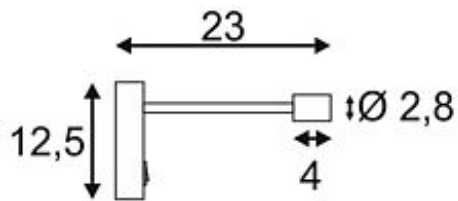

The modern high-voltage LED wall light of our PIPOFLEX series convinces by its clear and functional design. The powerful LED in the head of the lamp is connected to the canopy via a rubber sheathed flexible duct. Equipped with a switch located on the canopy, the individually adjustable fitting is suitable for various applications. We also offer a variety of modern colours. Thanks to the incorporated driver, the electrical connection is made directly to 230V mains. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.