



35W HIT MODULE for AIXLIGHT PENDANT SYSTEM

silvergrey G12 , max. 35W, adjustable, 60°

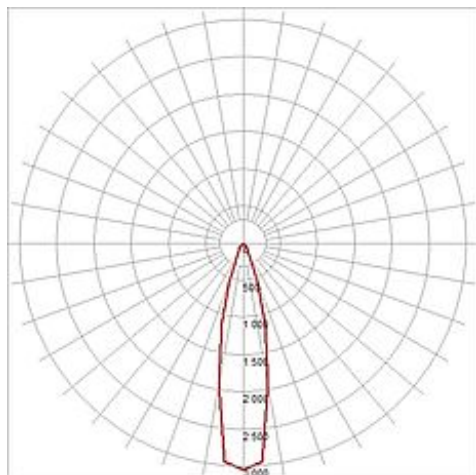

Article number	154824
Catalogue	BIG WHITE 2015, Page 107
Type of lamp	Conventional lamp
Lamp	HQI-T / CDM-T 35W
Lampholder / Socket	G12
Number of light sources	1
Lamp included	No
Tilt range	60 Degree
Length	32 cm
Width	19 cm
Height	16 cm
Net weight	2.005 kg
Gross weight	3.726 kg
Voltage	230 Volt
Max. wattage	35 Watt
Protection class	I
Beam angle	38 Degree
Material	aluminium
Colour	silvergrey
Way of mounting	ceiling mounting pendulum
Remark 1	180 cm connection lead included
Remark 2	For use in the basic frames of the Aixlight pendant system
Remark 3	Including a built-in electronic ballast
Remark 4	Energy labels in your language are available in the Service Area sub point Download
remark5	Needs 32cm space in the basic frame
Energy class ballast	A2
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

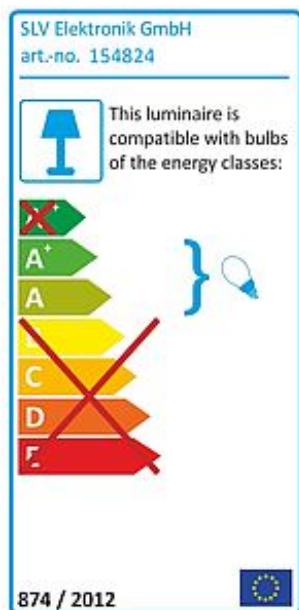

Light distribution
type 3

rotationally symmetric

In timelessly modern design we offer our AIXLIGHT PENDANT SYSTEM providing functional elegance combined with efficient technology. The basic frames are available in either 110cm or 160cm in length and used for the free placement of the light modules of choice. These are available as QRB111, G5 or metal halide version and form for the perfect solution for almost every application. The lampholders can be adjusted apart from each other and thus provide best illumination attributes. If necessary, a suitable ballast is already incorporated with the modules. The AIXLIGHT PENDANT SYSTEM is ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: A - A+