

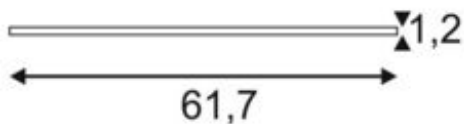


I-VIDUAL LED PANEL

recessed fitting, 3000K, square, white, L/W/H 61.7/61.7/1.2 cm, can be converted to a pendant, 40W

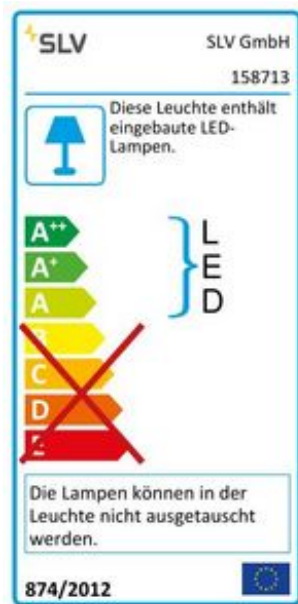

Article number	158713
Number of light sources	2
Installation length	60 cm
Installation width	60 cm
Max. wattage	40 Watt
Lamp	SMD LED Module
Light distribution type 1	Direct
Light distribution type 3	rotationally symmetric
Product family	LED Panel
Feed-in capability	No
Lamp included	No
Installation depth	5 cm
Length	61.7 cm
Width	61.7 cm
Height	1.3 cm
Net weight	4.31 kg
Gross weight	4.959 kg
Voltage	1000/1050 Volts
Protection class	III
Beam angle	110 Degree
Material	Aluminium/acrylic glass
Colour	white
Way of mounting	Recessed ceiling mounting
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	3250 lm
Energy efficiency class	A++
fastCalcEnabled	Yes
ranking	300
Catalogue page	BIG WHITE 2017: 522

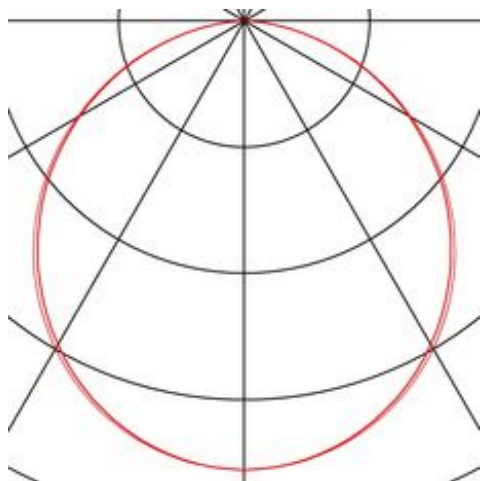

The I-VIDUAL LED PANEL comes in several colours of light, which we offer in a modern, space-saving solution for an efficient type of base lighting. By means of its dimensions, the LED PANEL is particularly suitable for grid ceilings. With a luminous flux of approx. 2900 lumens, you achieve a pleasant, uniform and glare-free illumination. Electrical connections require the use of an appropriate 1000mA driver. This luminaire contains built-in LED lamps. EEL A - A++ The lamps in the luminaire cannot be replaced.