

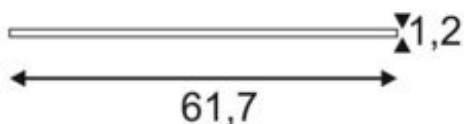


## I-VIDUAL LED PANEL

recessed fitting, 4000K, square, white, L/W/H 61.7/61.7/1.2 cm, can be converted to a pendant, 40W

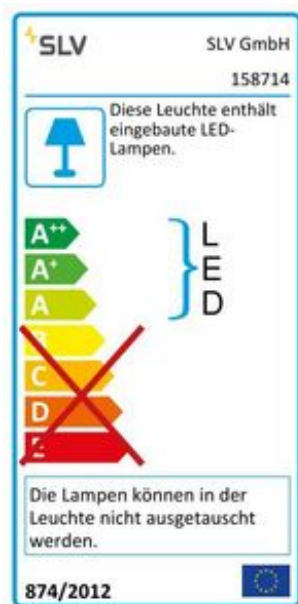

Article number	158714
Number of light sources	2
Installation length	60 cm
Installation width	60 cm
Max. wattage	40 Watt
Lamp	SMD LED Module
Light distribution type 1	Direct
Light distribution type 3	rotationally symmetric
Product family	LED Panel
Feed-in capability	No
Lamp included	No
Installation depth	5 cm
Length	61.7 cm
Width	61.7 cm
Height	1.3 cm
Net weight	3.648 kg
Gross weight	4.778 kg
Voltage	1000/1050 Volts
Protection class	III
Beam angle	110 Degree
Material	Aluminium/acrylic glass
Colour	white
Way of mounting	Recessed ceiling mounting
Average lifespan	30000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	80
Luminous flux	3650 lm
Energy efficiency class	A++
fastCalcEnabled	Yes
ranking	300
Catalogue page	BIG WHITE 2017: 522

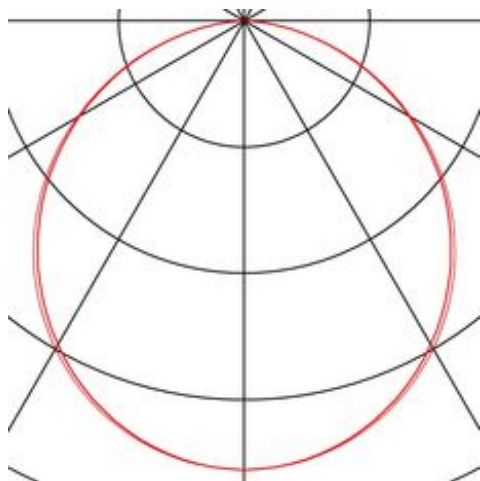

The I-VIDUAL LED PANEL for 60x60 grids comes in several colours of light. with it we offer a modern, space-saving solution for an efficient type of base lighting. Due to the variable constant current power supply of 1000mA to 1050mA, various standard or dimmable drivers can be used. With this product you reach a pleasant, homogeneous and glare-free lighting feeling.